




**GD2 - 1200** 


**Specifications** 

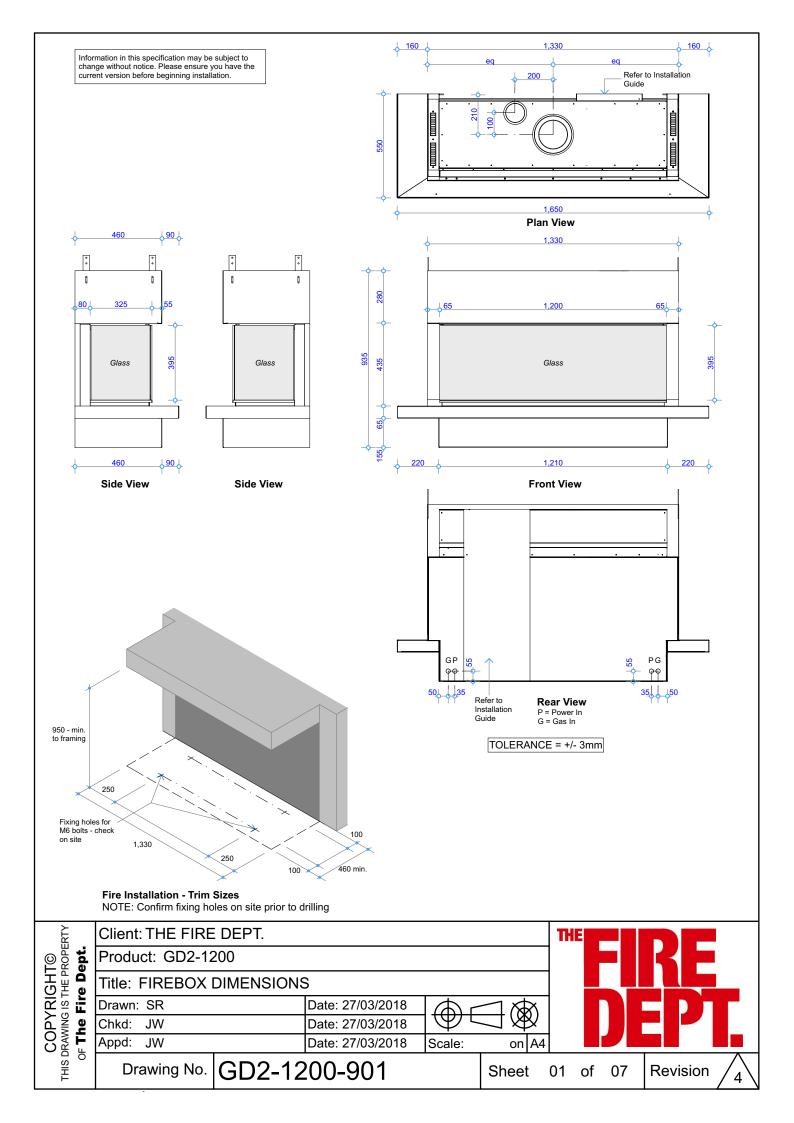

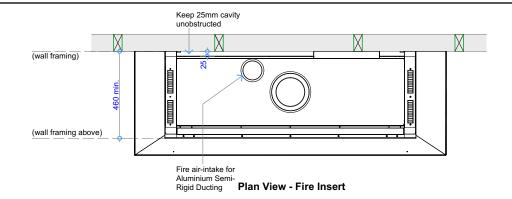


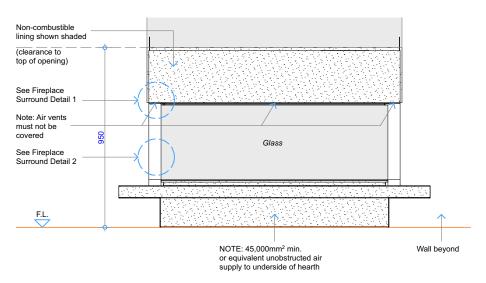

Front View - Fire Insert

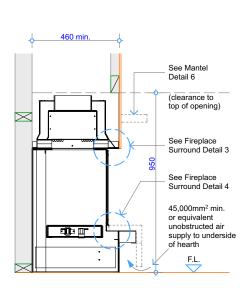

**Cross Section - Fire Insert at Floor Level** 

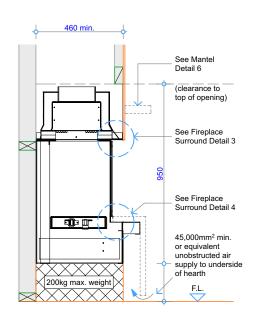

**Cross Section - Fire Insert on Raised Plinth** NOTE: Plinth height can vary to suit

Client: THE FIRE DEPT.

Product: GD2-1200

Title: CAVITY CLEARANCES

Drawn: SR

Date: 27/03/2018 JW Date: 27/03/2018 Chkd: Appd: Date: 27/03/2018 JW

Scale: on A4




GD2-1200-902 Drawing No.


Sheet 02 of 07

Revision


4




Detail 1 - Cross Section Fire Surround Opt. 1




Detail 1 - Cross Section Fire Surround Opt. 2




Detail 2 - Plan View Fire Surround Opt. 3




Detail 2 - Plan View Fire Surround Opt. 4




**Detail 3 - Top of Fire to Combustible Materials** 



Detail 4 - Bottom of Fire to Floor Opt. 5 NOTE: 45,000mm² min. or equivalent unobstructed air supply to

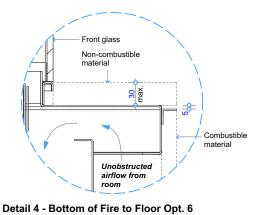

NOTE: 45,000mm² min. or equivalent unobstructed air supply to underside of hearth



**Detail 6 - Top of Fire to Combustible Mantel** 

COPYRIGHT©
THIS DRAWING IS THE PROPERTY
OF **The Fire Dept.** 

Client: THE FIRE DEPT.

Product: GD2-1200


Title: SURROUND DETAILS

 Drawn:
 SR
 Date:
 27/03/2018

 Chkd:
 JW
 Date:
 27/03/2018

 Appd:
 JW
 Date:
 27/03/2018

e: 27/03/2018






Drawing No. GD2-1200-903

Sheet 03 of 07

Revision

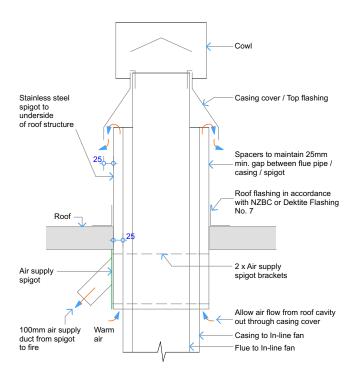

# Detail - Air Ventilation through Casing cover/ Top flashing


Flue components: 100mm dia. Flue 150mm dia. Casing 200mm dia. Spigot Dektite Flashing No. 7

#### NOTE:


Flue components must be installed to AS/NZS5601 requirements.

All external penetration flashings must be installed in accordance with NZBC.

Fire supplied with 3m of 5 core wire from fire to fan. Cavity airflow must be unobstructed from fire to flue termination. 25mm clearance between flue and combustible materials. 75mm clearance between flue and wiring / plastic water pipes. Horizontal flue run must fall 20mm for every 1000mm towards the fire. Each flue joint must be sealed with a heat proof sealer. Each flue joint must have a minimum of 4 x riverts. Flue to be adequately supported at 2.4m crs. Fix Aluminium Semi-Rigid Duct with 4 x rivets and sufficient duct tape to fire, spigot, and at each joint.




Detail - In-Line Fan NOTE: Requires access hatch for maintenance

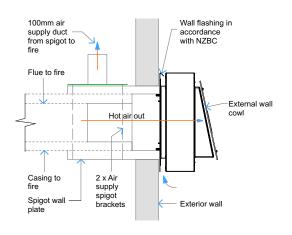


# **Detail - Air Ventilation through Wall**


Flue components: 100mm dia. Flue 150mm dia. Casing 200mm dia. Spigot

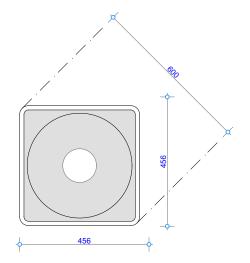

Dektite Flashing No. 7 - Plan View

COPYRIGHT©
THIS DRAWING IS THE PROPERTY Client: THE FIRE DEPT. oF The Fire Dept. Product: GD2-1200 **VERTICAL & HORIZONTAL FLUE EXIT DETAILS** Title: Date: 27/03/2018 Drawn: SR Date: 27/03/2018 Chkd: JW Appd: Date: 27/03/2018 JW Scale: on GD2-1200-904 Drawing No. Sheet 04 07 Revision of

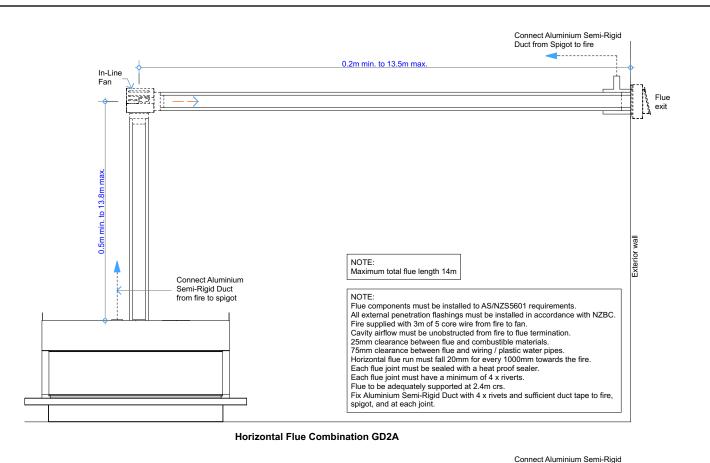

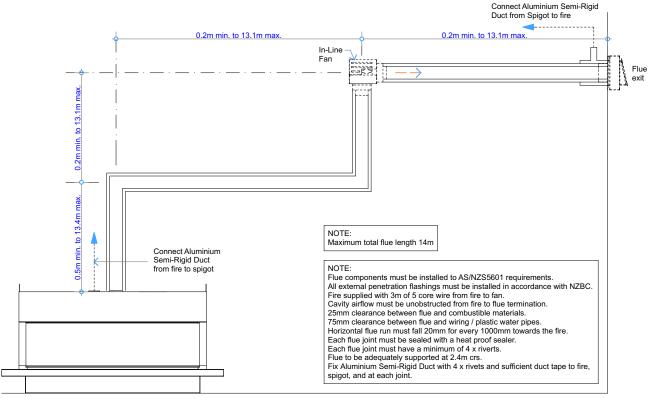

### **Horizontal Flue Combination GD2B**


COPYRIGHT©
THIS DRAWING IS THE PROPERTY Client: THE FIRE DEPT. oF The Fire Dept. Product: GD2-1200 Title: HORIZONTAL FLUE COMBINATION OPTIONS Date: 27/03/2018 Drawn: SR Date: 27/03/2018 Chkd: JW Appd: Date: 27/03/2018 JW Scale: on

Drawing No.


GD2-1200-905

05 07 Sheet of

Revision

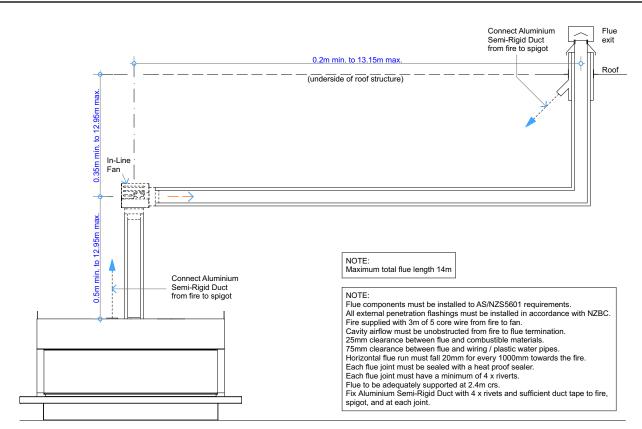

#### Vertical Flue Combination GD2C

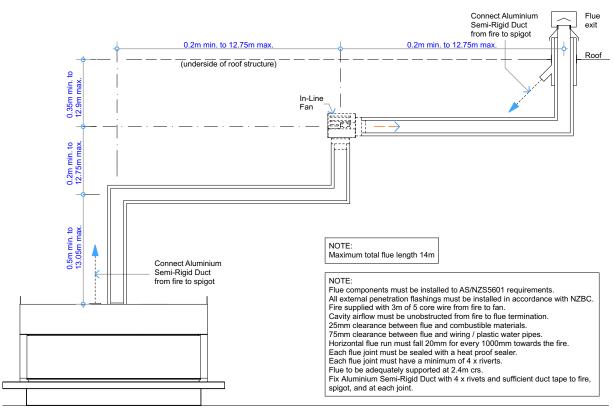

**Vertical Flue Combination GD2D** 

Client: THE FIRE DEPT. COPYRIGHT©
THIS DRAWING IS THE PROPERTY oF The Fire Dept. Product: GD2-1200 Title: VERTICAL FLUE COMBINATION OPTIONS Date: 27/03/2018 SR Drawn: Date: 27/03/2018 Chkd: JW Appd: Date: 27/03/2018 JW Scale: GD2-1200-906

Drawing No.



06 07 Sheet of

Revision

4

