



GD61 - 1200


**Specifications** 

1,460 Information in this specification may be subject to change without notice. Please ensure you have the current version before beginning installation. Plan View <u>| 130 |</u>





TOLERANCE = +/- 3mm



Fire Installation NOTE: Confirm fixing holes on site prior to drilling

100 - min. to combustibles


Fire Installation - Clearance to Combustibles

Client: THE FIRE DEPT.

Product: GD61-1200

Title: FIREBOX DIMENSIONS

Date: 08/12/2017 Drawn: SR Date: 08/12/2017 Chkd: JW Appd: JW Date: 08/12/2017






Drawing No.

Sheet 01 of 02 Revision

COPYRIGHT©
THIS DRAWING IS THE PROPERTY oF The Fire Dept.

GD61-1200-901

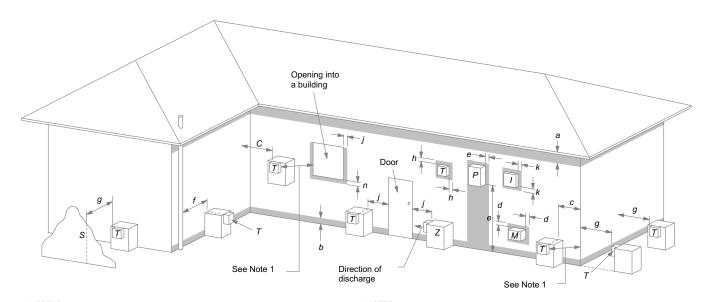

LEGEND:

I = Mechanical air inletM = Gas meter

P = Electricity meter or fuse box
S = Structure
T = Flue terminal

a = 200 b = 300 c = 300 d = 1000 e = 500 f = 75

Z = Fan-assisted appliance only

Shading indicates prohibited area for flue terminals

## NOTES:

Where dimensions *c*, *j* or *k* cannot be achieved an equivalent horizontal distance measured diagonally from the nearest discharge point of the terminal to the opening may be deemed by the Technical Regulator to comply.

Location of Flue Terminals of Balanced Flue, Room-Sealed, Fan-Assisted or Outdoor Appliances

g = 500 h = 300 j = 300 (at window) & 1500

(fan-assisted appliance by the door) k = 1000 n = 500

NOTE: To be read in conjunction with AS/NZS 5601.1:2013

COPYRIGHT©
THIS DRAWING IS THE PROPERTY oF The Fire Dept. Client: THE FIRE DEPT.

Product: GD61-1200

Title: FLUE EXIT CLEARANCES

Date: 08/12/2017 Drawn: SR Chkd: JW Date: 08/12/2017 Appd: JW Date: 08/12/2017

on A4 Scale:



GD61-1200-902 Drawing No.

Sheet 02 of 02 Revision