





WD1 – 1000 Open Front & Left

Specifications


Information in this specification may be subject to change without notice. Please ensure you have the current version before beginning installation.

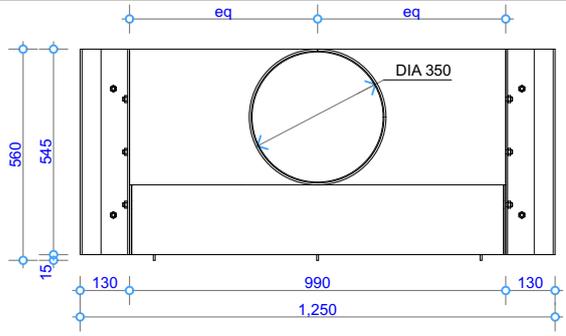

Plan View

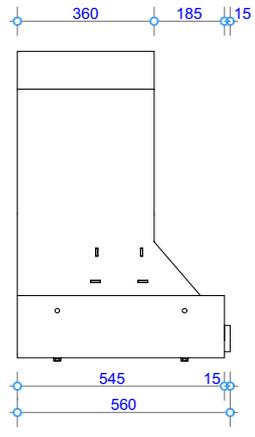


Side View

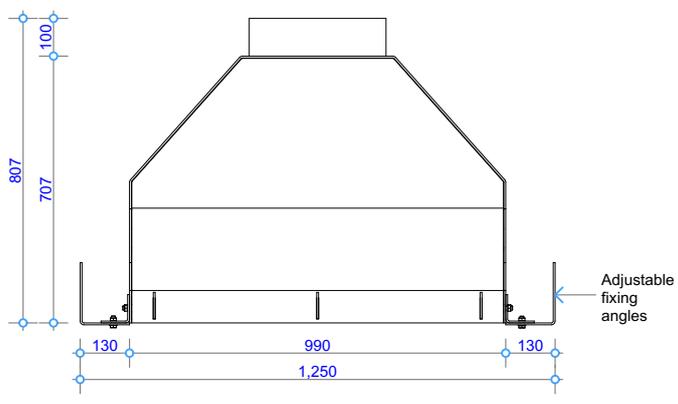


Front View

TOLERANCE = +/- 3mm

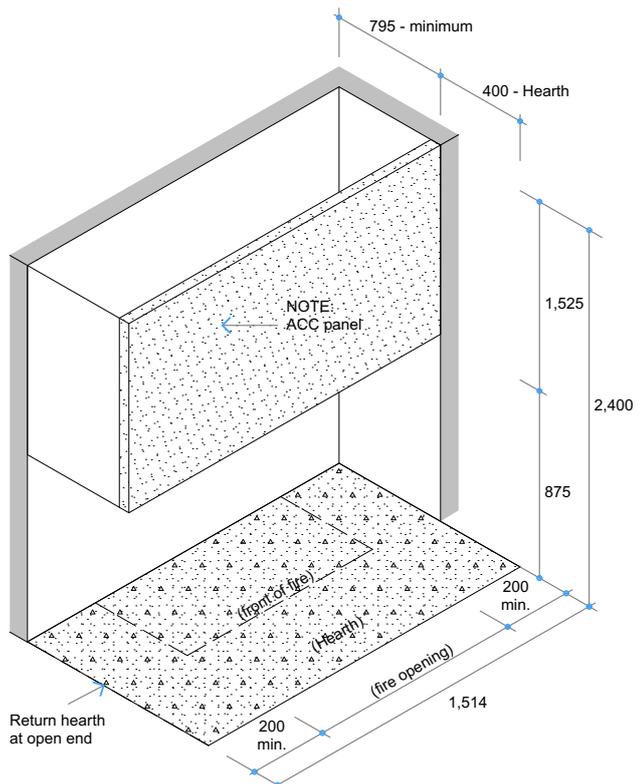

Fire Installation Requirements & Hearth Size - Timber Cavity
 NOTE: Hearth to extend minimum of 200mm both sides of fire opening, and 400mm from front of fire opening

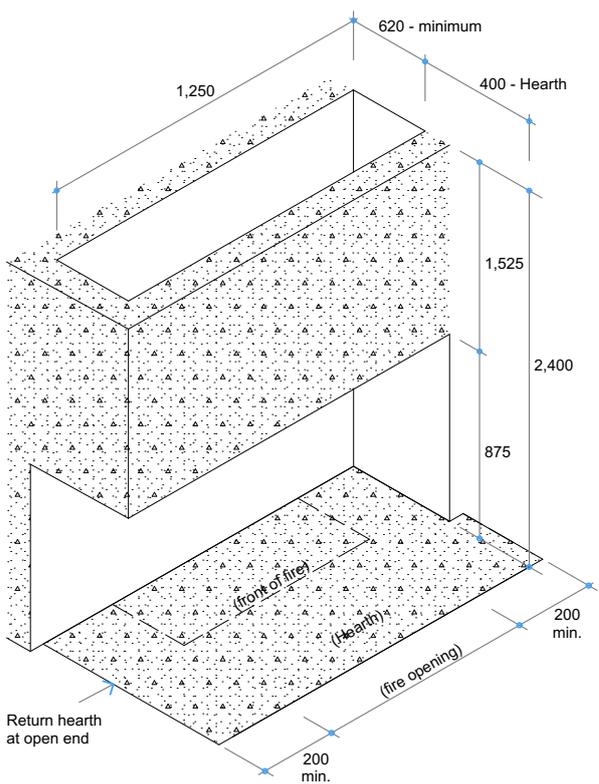

Fire Installation Requirements & Hearth Size - Concrete Cavity
 NOTE: Hearth to extend minimum of 200mm both sides of fire opening, and 400mm from front of fire opening




COPYRIGHT ©
 THIS DRAWING IS THE PROPERTY
 OF The Fire Dept.

Client: THE FIRE DEPT.		
Product: WD1OL-1000		
Title: FIRE DIMENSIONS		
Drawn: SR	Date: 31/05/2018	
Chkd: JW	Date: 31/05/2018	
Appd: JW	Date: 31/05/2018	
Scale:		on A4



Drawing No.	WD1OL-1000-901	Sheet 01 of 15	Revision 4
-------------	-----------------------	----------------	--

Information in this specification may be subject to change without notice. Please ensure you have the current version before beginning installation.

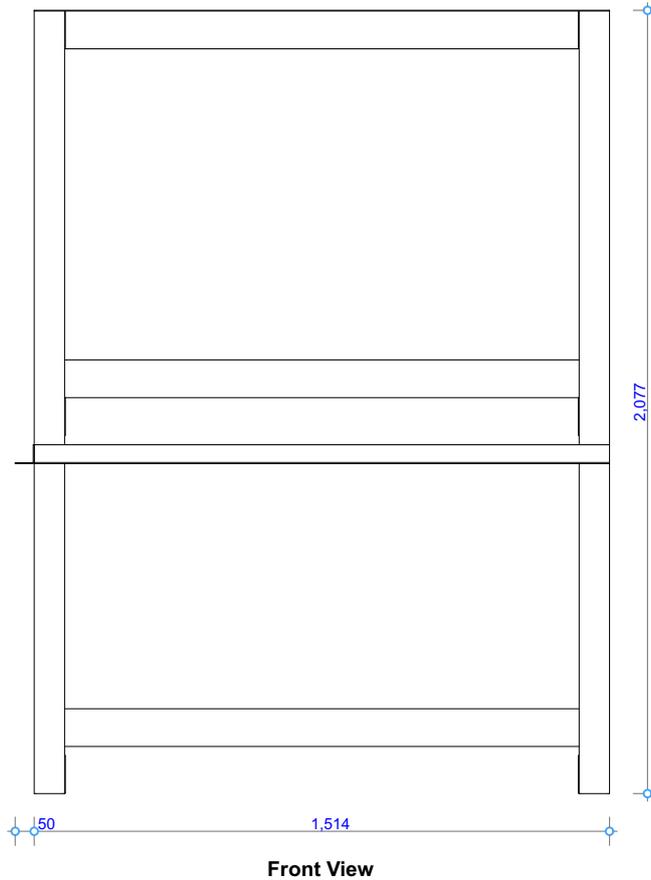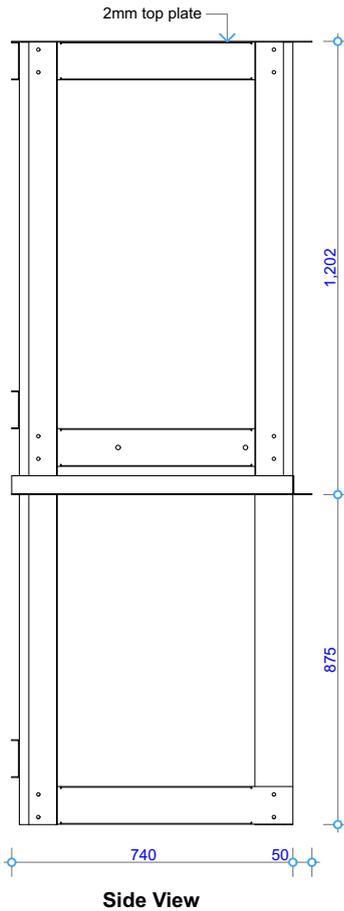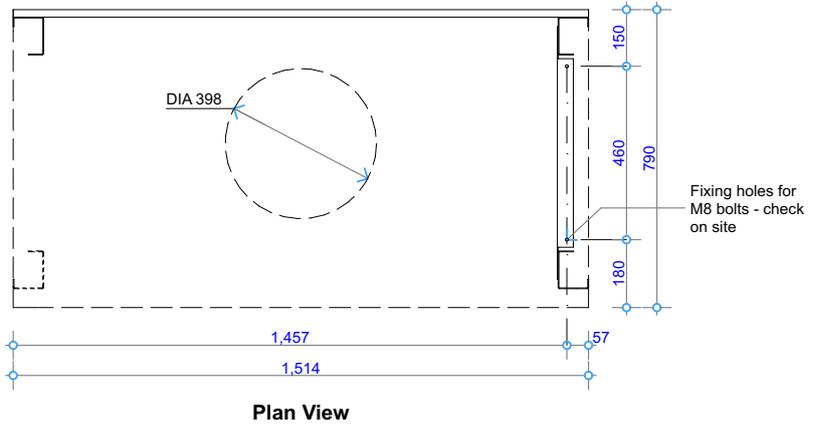

COPYRIGHT©
THIS DRAWING IS THE PROPERTY
OF The Fire Dept.

Client: THE FIRE DEPT.

Product: WD1OL-1000

Title: STEEL SUPPORT FRAME DIMENSIONS

Drawn: SR


Date: 31/05/2018

Chkd: JW

Date: 31/05/2018

Appd: JW

Date: 31/05/2018



Scale: on A4


THE
**FIRE
DEPT.**

Drawing No. **WD1OL-1000-902**


Sheet 02 of 15

Revision

4

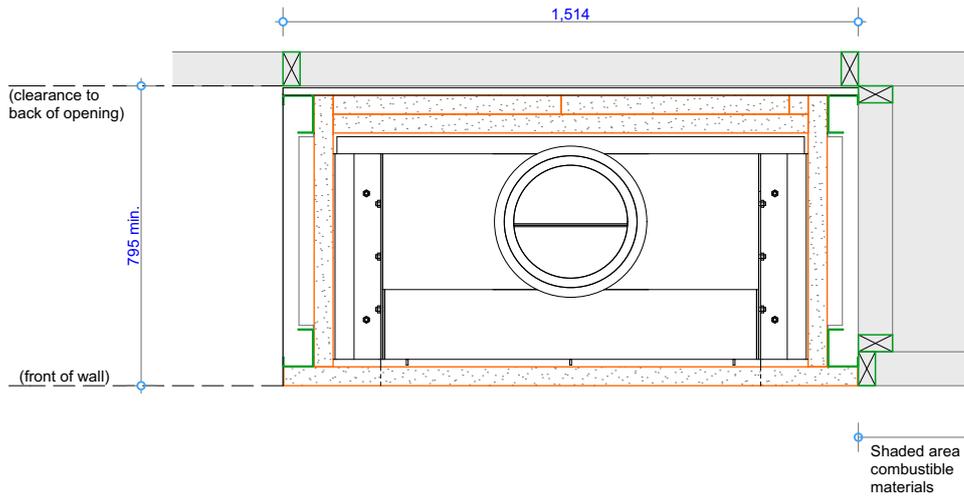

Plan View - Fire Insert (above fire gather)

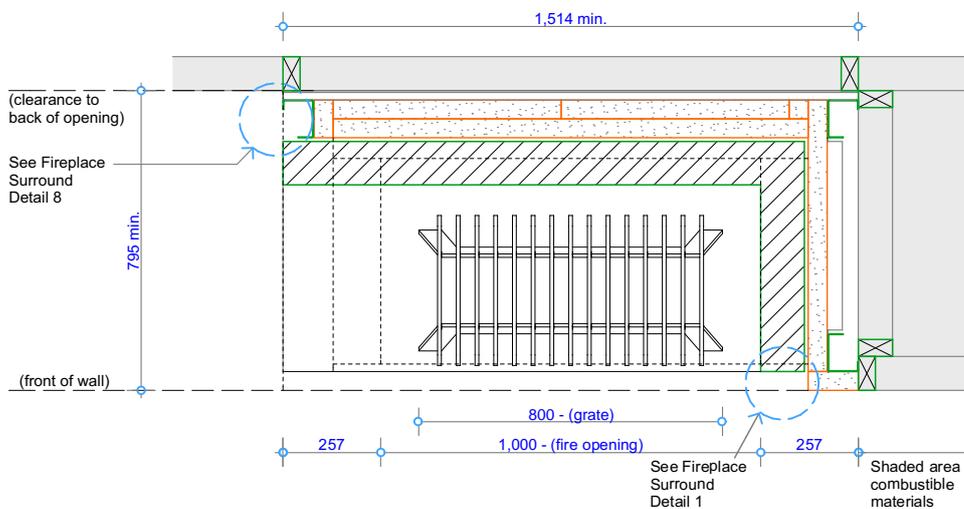

Plan View - Fire Insert (below fire gather)

COPYRIGHT©
 THIS DRAWING IS THE PROPERTY
 OF **The Fire Dept.**

Client: THE FIRE DEPT.

Product: WD1OL-1000

Title: CAVITY CLEARANCES - TIMBER

Drawn: SR


Date: 31/05/2018

Chkd: JW

Date: 31/05/2018

Appd: JW

Date: 31/05/2018




THE FIRE DEPT.

Drawing No. **WD1OL-1000-903**

Sheet 03 of 15

Revision

4

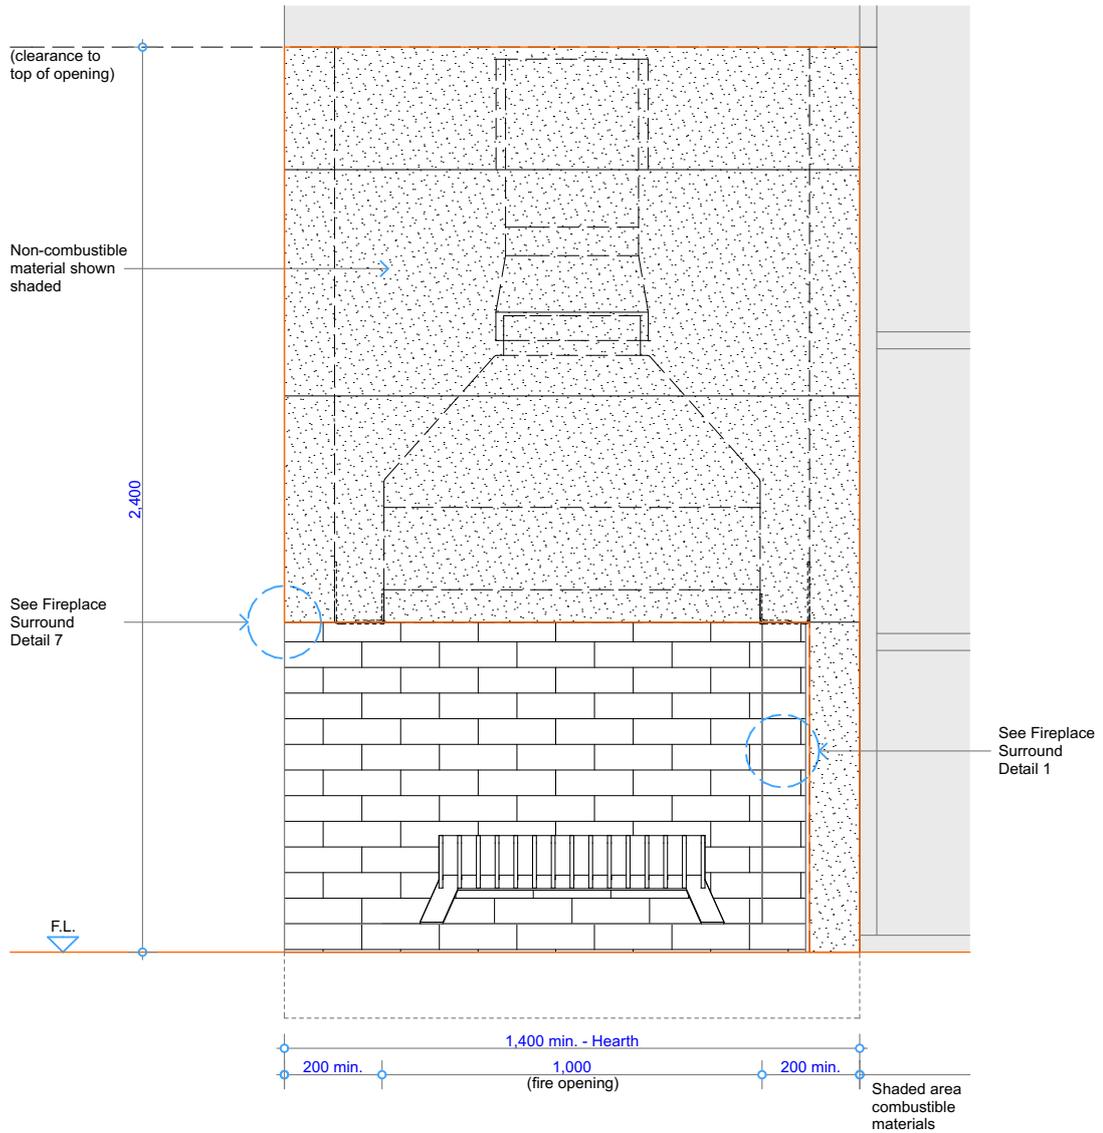

Front View - Fire Insert

COPYRIGHT©
 THIS DRAWING IS THE PROPERTY
 OF **The Fire Dept.**

Client: THE FIRE DEPT.

Product: WD1OL-1000

Title: CAVITY CLEARANCES - TIMBER

Drawn: SR


Date: 31/05/2018

Chkd: JW

Date: 31/05/2018

Appd: JW

Date: 31/05/2018



Scale: on A4


THE FIRE DEPT.

Drawing No. **WD1OL-1000-904**

Sheet 04 of 15

Revision

4

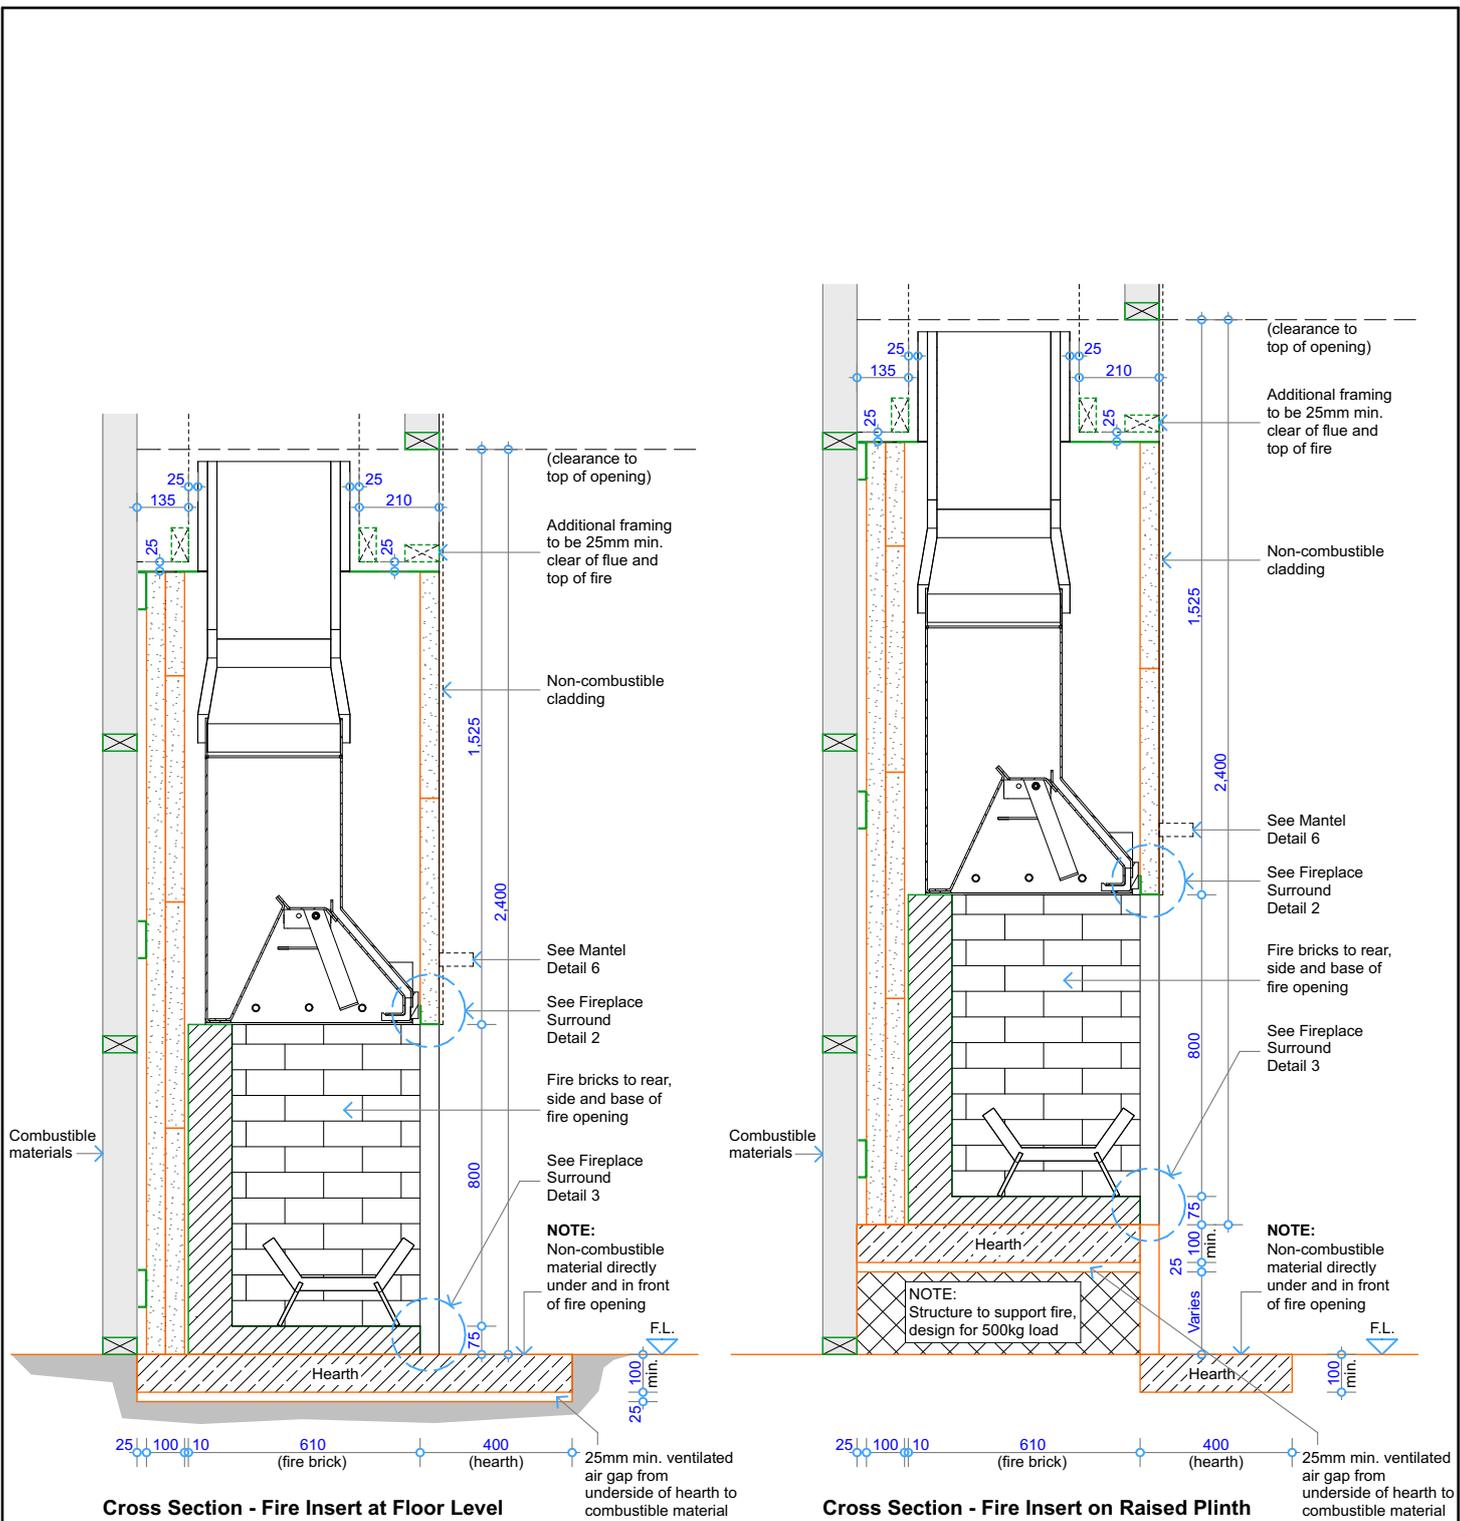


Cross Section - Fire Insert at Floor Level

Cross Section - Fire Insert on Raised Plinth

NOTE: Plinth height can vary to suit

NOTE:
Room requires air inlet
equal to 100,000mm².

COPYRIGHT © THIS DRAWING IS THE PROPERTY OF The Fire Dept.	Client: THE FIRE DEPT.			
	Product: WD1OL-1000			
	Title: CAVITY CLEARANCES - TIMBER			
	Drawn: SR	Date: 31/05/2018		
	Chkd: JW	Date: 31/05/2018		
Appd: JW	Date: 31/05/2018	Scale: on A4		
Drawing No.	WD1OL-1000-905		Sheet 05 of 15	Revision 4

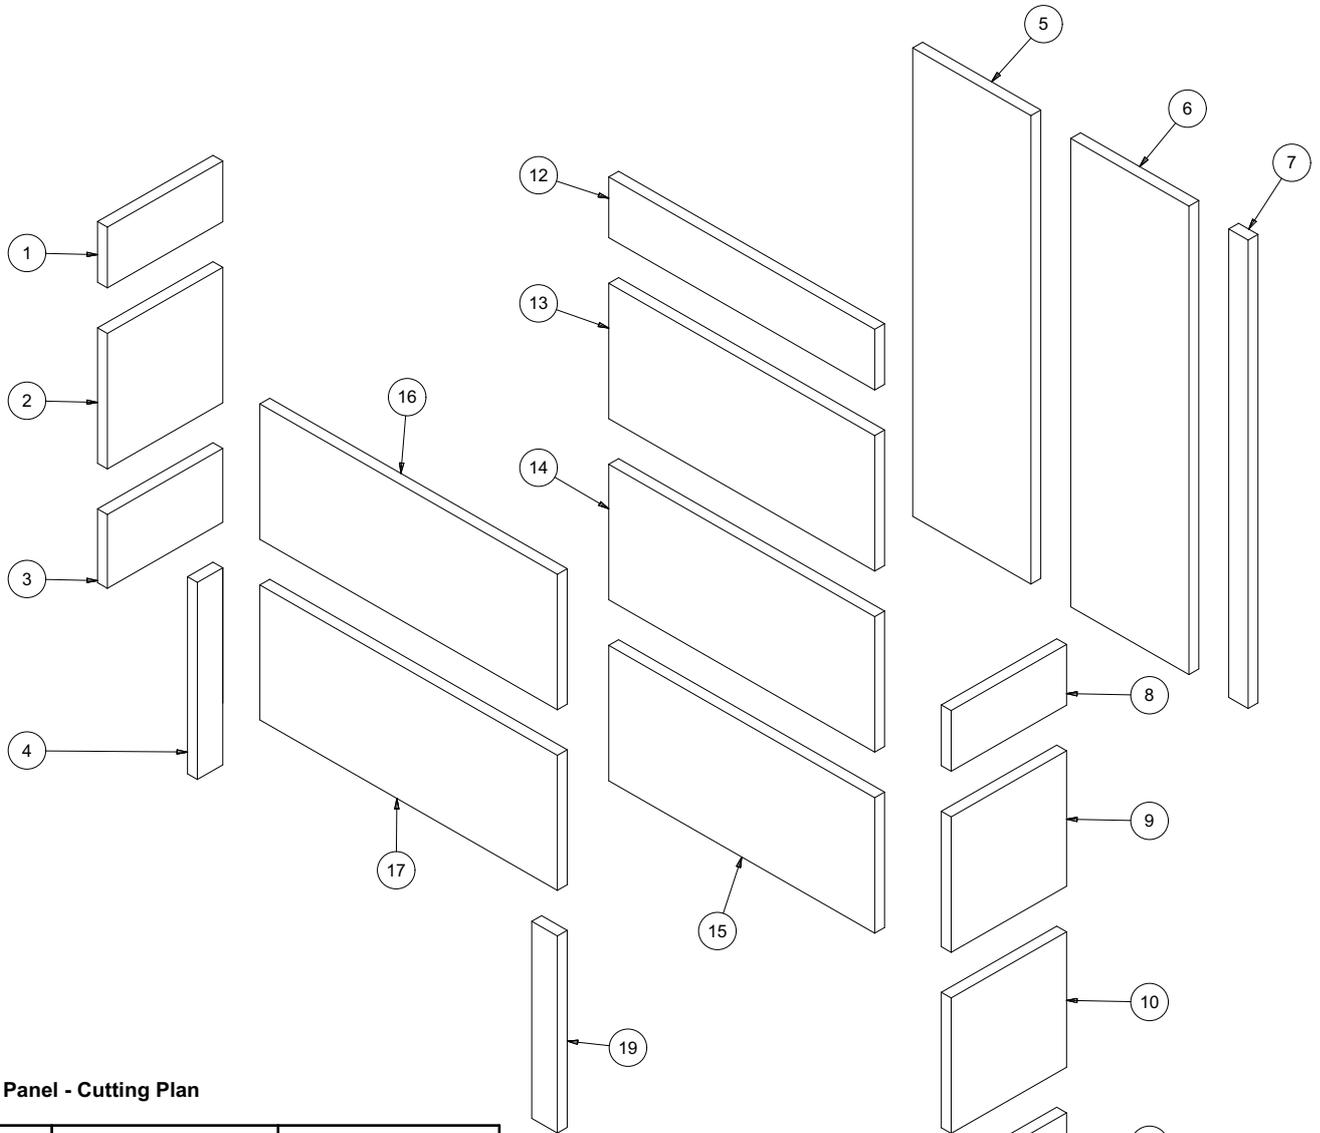

Celcrete Panel - Cutting Plan


ITEM	QTY	DESCRIPTION	MEASUREMENT
1	1	Side panel 1	720mm x 275mm
2	1	Side panel 2	720mm x 600mm
3	1	Side panel 3	720mm x 325mm
4	1	Side panel 4	100mm x 875mm
5	1	Back panel 1	600mm x 2075mm
6	1	Back panel 2	600mm x 2075mm
7	1	Back panel 3	50mm x 2075mm
8	1	Side panel 5	720mm x 275mm
9	1	Side panel 6	720mm x 600mm
10	1	Side panel 7	720mm x 600mm
11	1	Side panel 8	720mm x 600mm
12	1	Back panel 4	275mm x 1250mm
13	1	Back panel 5	600mm x 1250mm
14	1	Back panel 6	600mm x 1250mm
15	1	Back panel 7	600mm x 1250mm
16	1	Front panel 1	600mm x 1510mm
17	1	Front panel 2	600mm x 1510mm
18		Panel not required	
19	1	Front panel 4	130mm x 875mm

COPYRIGHT ©
 THIS DRAWING IS THE PROPERTY
 OF The Fire Dept.


Client: THE FIRE DEPT.		
Product: WD1OL-1000		
Title: CELCRETE CUTTING PLAN - TIMBER CAVITY		
Drawn: SR	Date: 31/05/2018	
Chkd: JW	Date: 31/05/2018	
Appd: JW	Date: 31/05/2018	
Scale:		on A4



Drawing No.	WD1OL-1000-906	Sheet 06 of 15	Revision 4
-------------	-----------------------	----------------	--

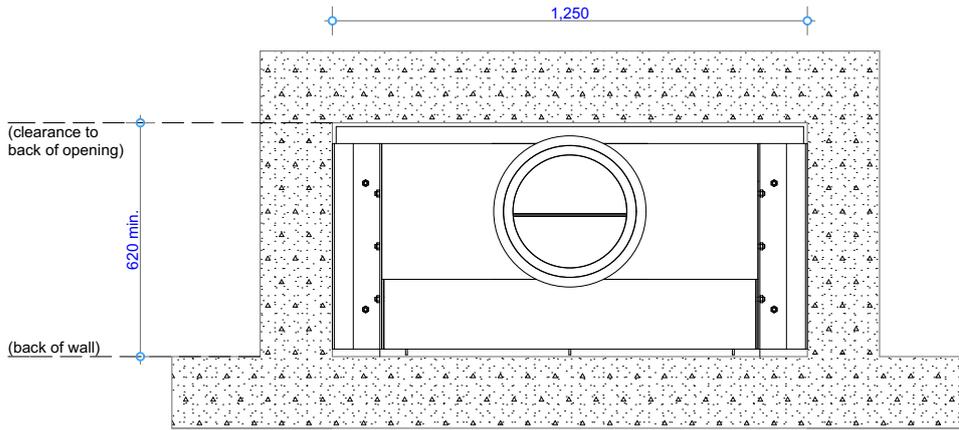


Plan View - Fire Insert (above fire gather)

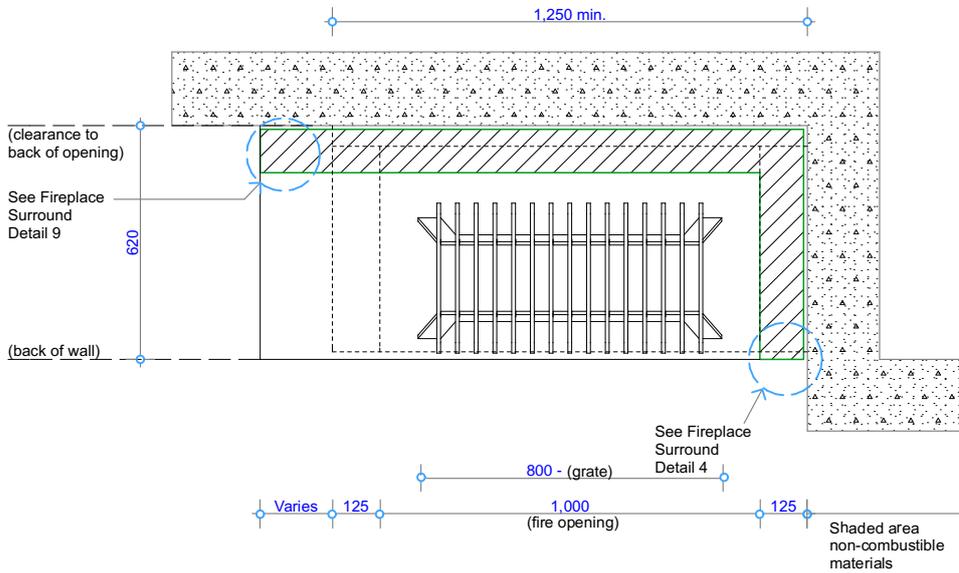


Plan View - Fire Insert (below fire gather)

COPYRIGHT©
 THIS DRAWING IS THE PROPERTY
 OF **The Fire Dept.**

Client: THE FIRE DEPT.		
Product: WD1OL-1000		
Title: CAVITY CLEARANCES - CONCRETE		
Drawn: SR	Date: 31/05/2018	
Chkd: JW	Date: 31/05/2018	
Appd: JW	Date: 31/05/2018	
Scale:		on A4


THE
 FIRE
 DEPT.

Drawing No.	WD1OL-1000-907	Sheet 07 of 15	Revision 4
-------------	----------------	----------------	--

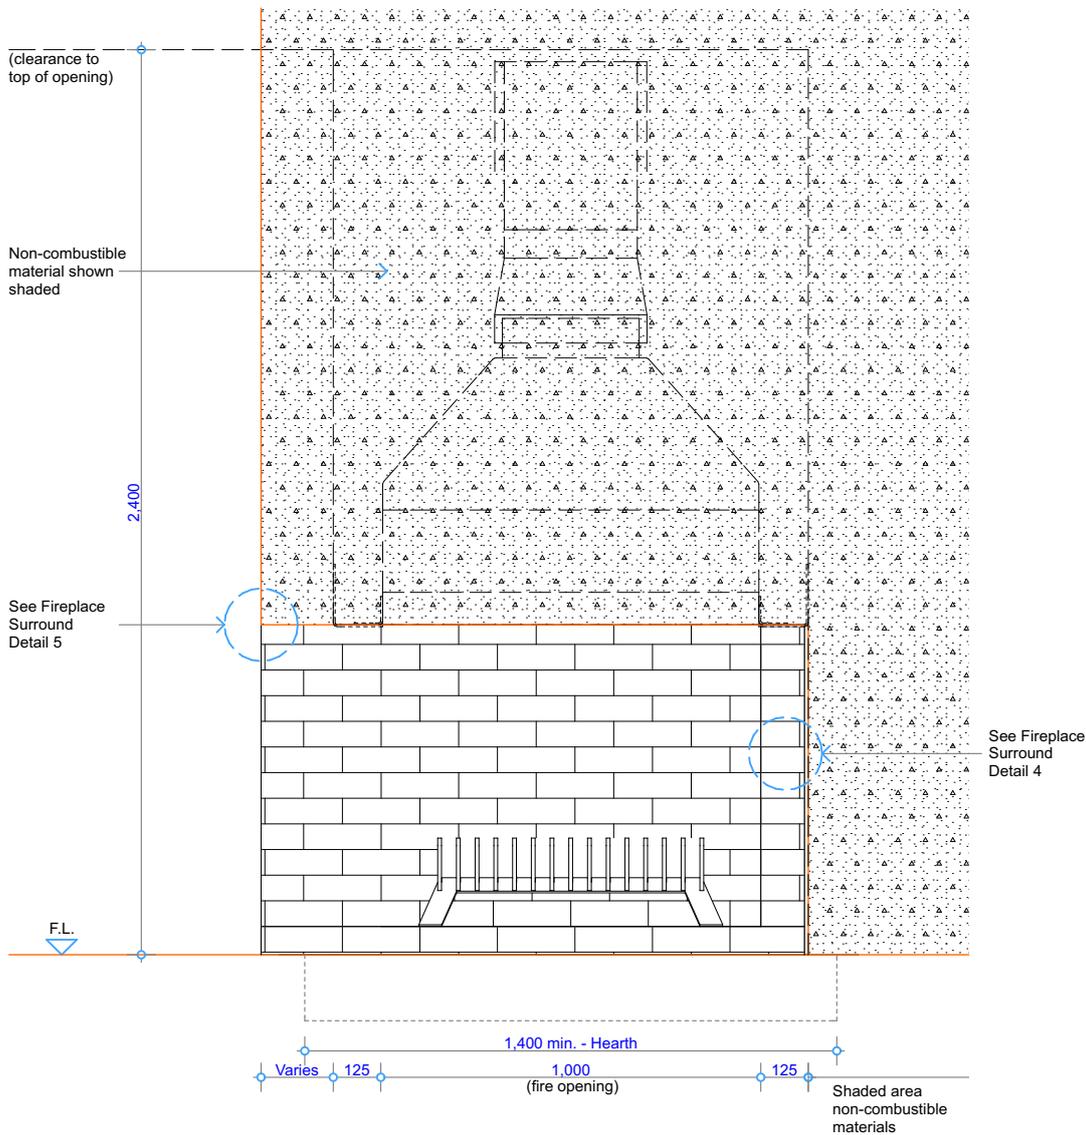


Front View - Fire Insert

COPYRIGHT© THIS DRAWING IS THE PROPERTY OF The Fire Dept.	Client: THE FIRE DEPT.			
	Product: WD1OL-1000			
	Title: CAVITY CLEARANCES - CONCRETE			
	Drawn: SR	Date: 31/05/2018		
	Chkd: JW	Date: 31/05/2018		
Appd: JW	Date: 31/05/2018			
Drawing No.	WD1OL-1000-908	Sheet 08 of 15	Revision 4	

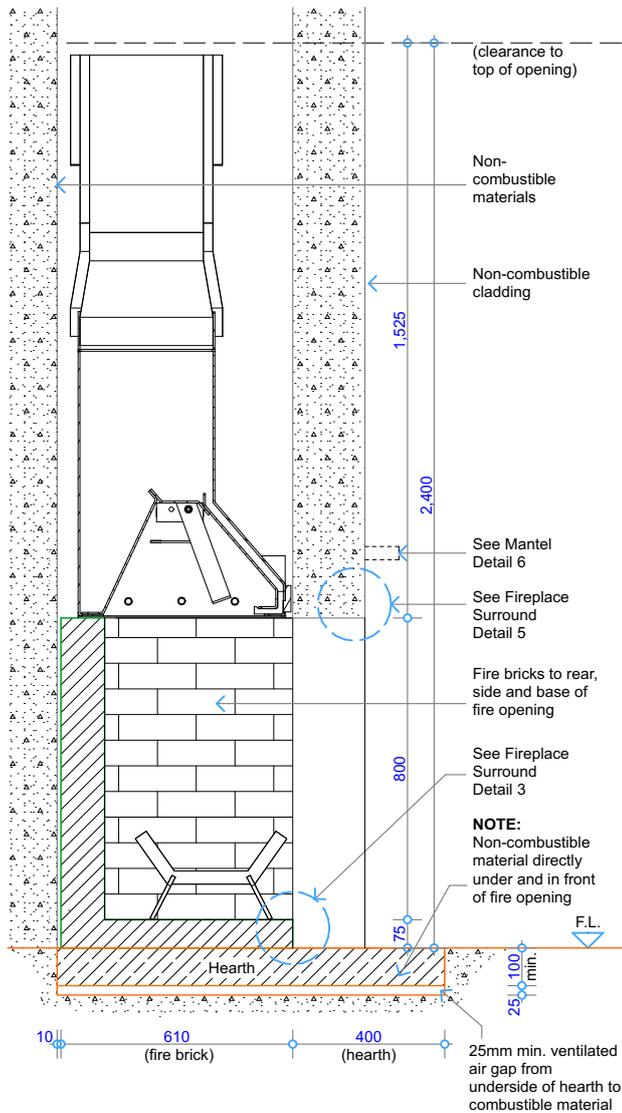

Cross Section - Fire Insert at Floor Level

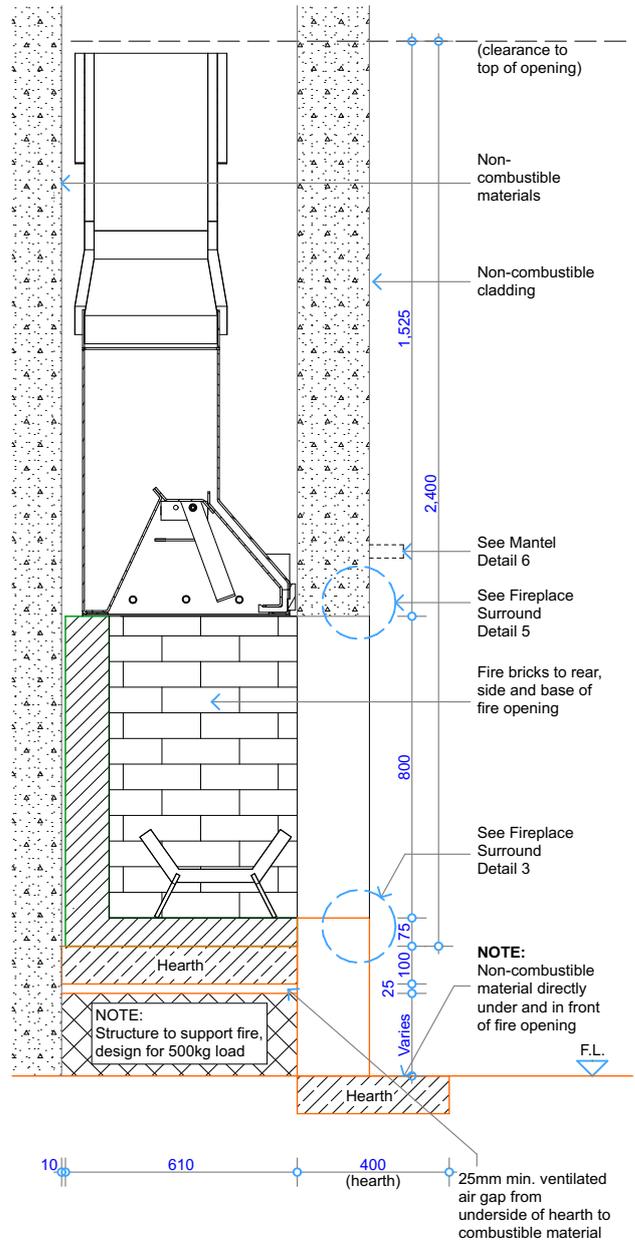

Cross Section - Fire Insert at Floor Level

NOTE:
Room requires air inlet equal to 100,000mm².

COPYRIGHT©
THIS DRAWING IS THE PROPERTY
OF The Fire Dept.

Client: THE FIRE DEPT.

Product: WD1OL-1000

Title: CAVITY CLEARANCES - CONCRETE

Drawn: SR


Date: 31/05/2018

Chkd: JW

Date: 31/05/2018

Appd: JW

Date: 31/05/2018



Scale: on A4


THE
**FIRE
DEPT.**

Drawing No. **WD1OL-1000-909**


Sheet 09 of 15

Revision


4

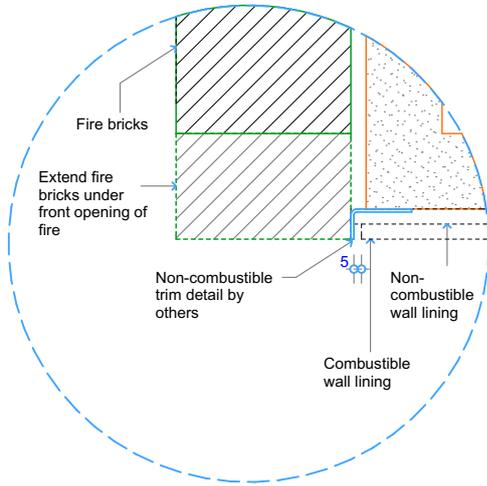


**Detail 1 - Plan View Fire Surround Opt. 1
Timber Cavity**

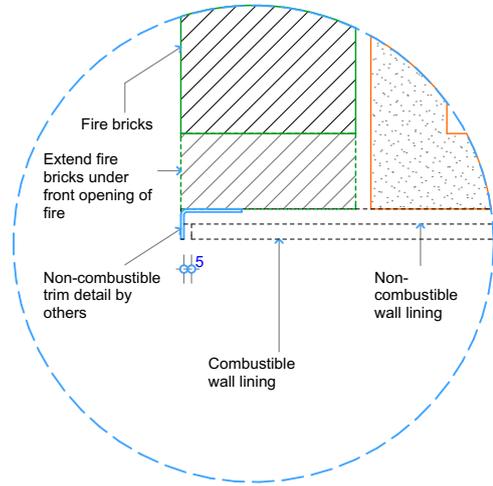


**Detail 1 - Plan View Fire Surround Opt. 2
Timber Cavity**

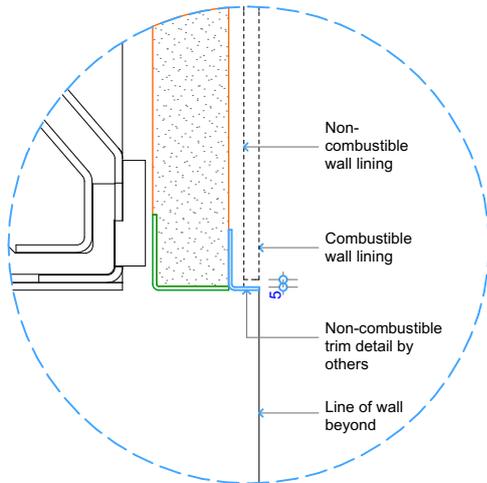


**Detail 2 - Cross Section Fire Surround Opt. 3
Timber Cavity**

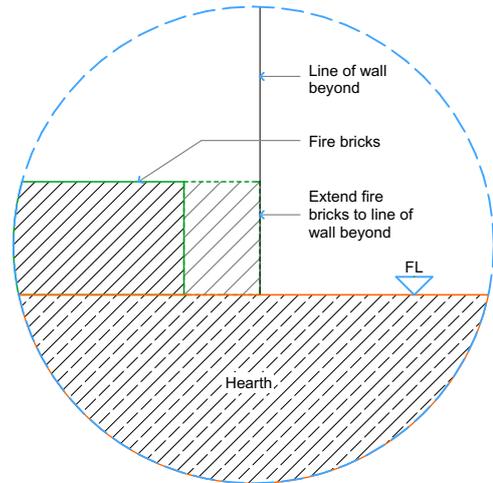

**Detail 3 - Cross Section Fire Surround Opt. 4
Timber Cavity**

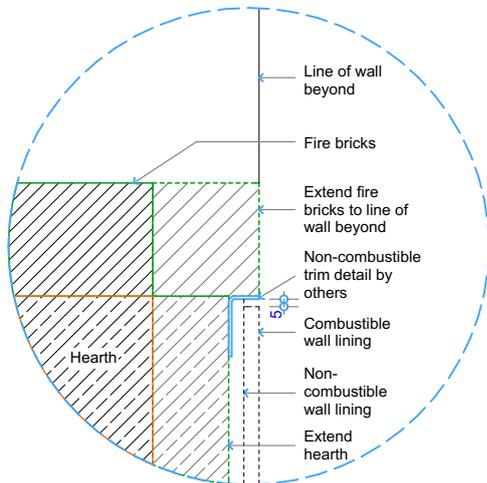

**Detail 3 - Cross Section Fire Surround Opt. 5
Timber Cavity**

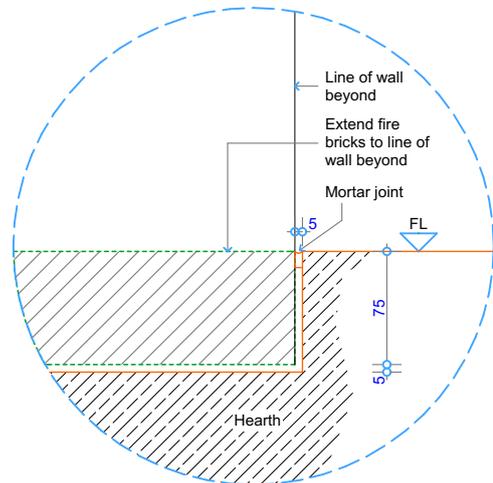


**Detail 3 - Cross Section Fire Surround Opt. 6
Concrete Cavity**

COPYRIGHT©
 THIS DRAWING IS THE PROPERTY
 OF **The Fire Dept.**


Client: THE FIRE DEPT.		
Product: WD1OL-1000		
Title: SURROUND DETAILS		
Drawn: SR	Date: 31/05/2018	
Chkd: JW	Date: 31/05/2018	
Appd: JW	Date: 31/05/2018	
Scale:		on A4




Drawing No.	WD1OL-1000-910	Sheet 10 of 15	Revision 4
-------------	-----------------------	----------------	--

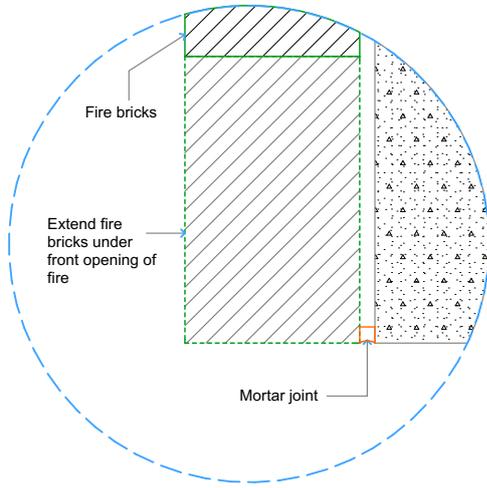


**Detail 4 - Plan View Fire Surround Opt. 7
Concrete Cavity**

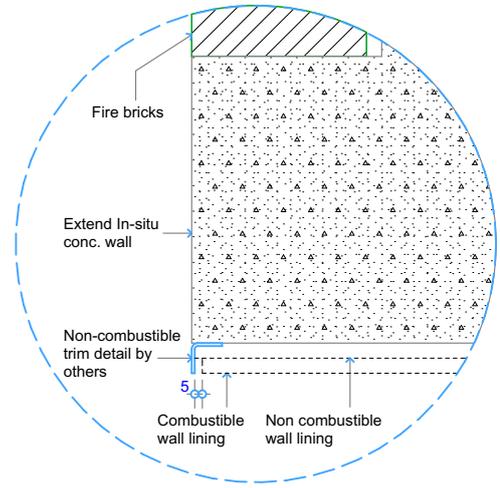


**Detail 4 - Plan View Fire Surround Opt. 8
Concrete Cavity**

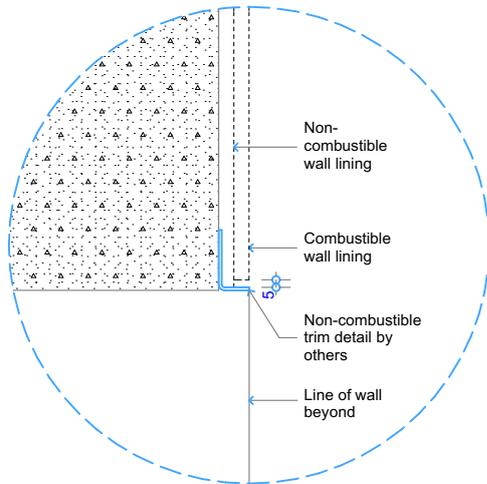


**Detail 5 - Cross Section Fire Surround Opt. 9
Concrete Cavity**

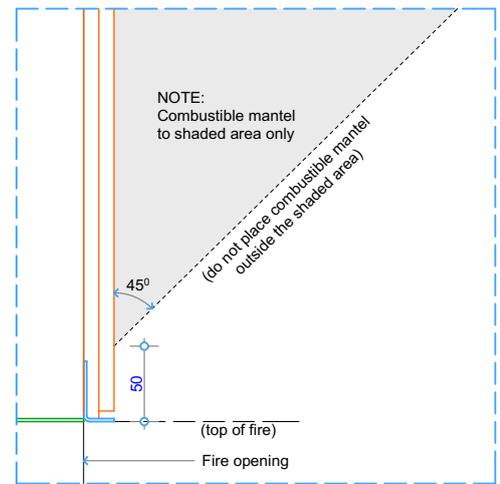

Detail 6 - Top of Fire to Combustible Mantel

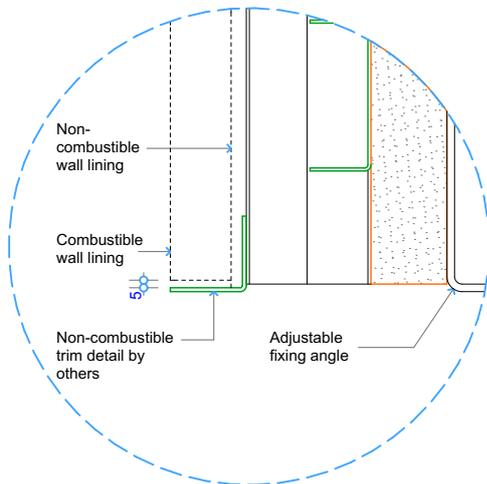


**Detail 7 - Cross Section Fire Surround
Timber Cavity**

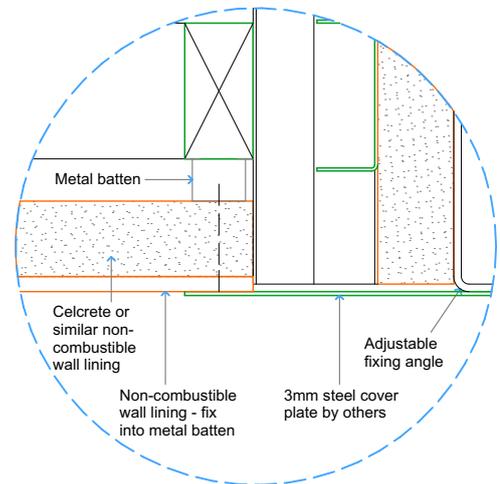


**Detail 7 - Cross Section Fire Surround Opt. 14
Timber Cavity**


COPYRIGHT© THIS DRAWING IS THE PROPERTY OF The Fire Dept.	Client: THE FIRE DEPT.			
	Product: WD1OL-1000			
	Title: SURROUND DETAILS			
	Drawn: SR	Date: 31/05/2018		
	Chkd: JW	Date: 31/05/2018		
Appd: JW	Date: 31/05/2018	Scale: on A4		
Drawing No.	WD1OL-1000-911		Sheet 11 of 15	Revision 4

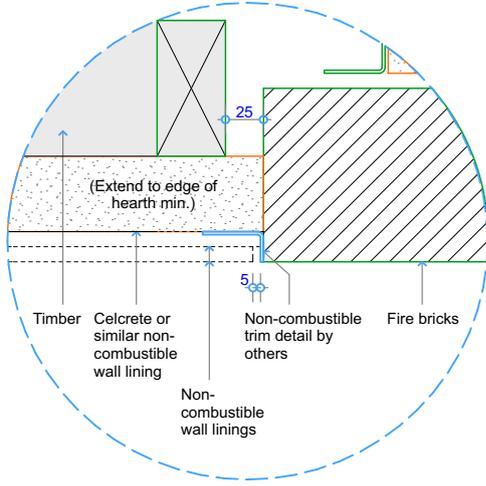


**Detail 8 - Plan View Fire Surround Opt. 10
Timber Cavity**

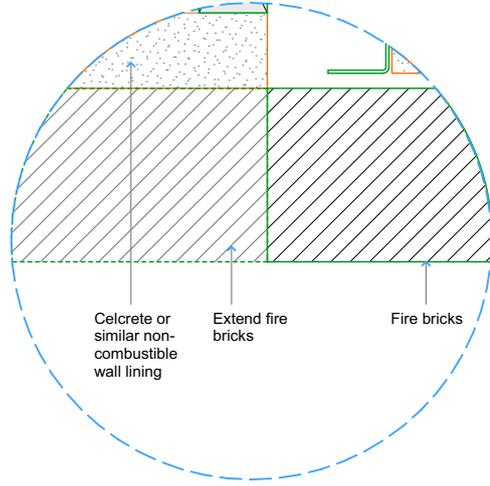

**Detail 8 - Plan View Fire Surround Opt. - 11
Timber Cavity**

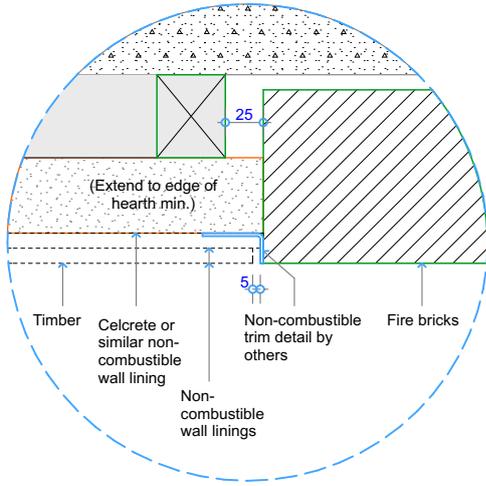

**Detail 9 - Plan View Fire Surround Opt. - 12
Concrete Cavity**

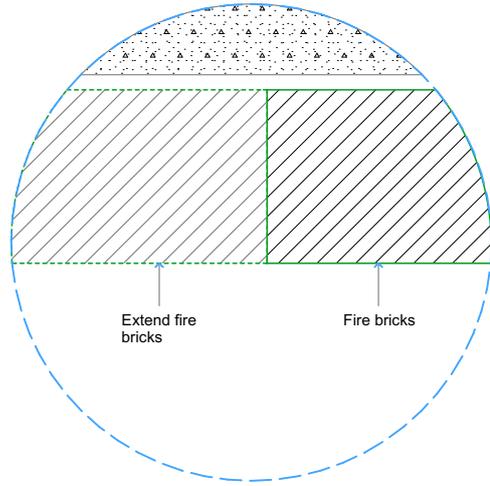

**Detail 9 - Plan View Fire Surround Opt. - 13
Concrete Cavity**

COPYRIGHT©
 THIS DRAWING IS THE PROPERTY
 OF **The Fire Dept.**

Client: THE FIRE DEPT.		
Product: WD1OL-1000		
Title: SURROUND DETAILS		
Drawn: SR	Date: 31/05/2018	
Chkd: JW	Date: 31/05/2018	
Appd: JW	Date: 31/05/2018	
Scale:		on A4





Drawing No. **WD1OL-1000-912**

Sheet 12 of 15

Revision

4

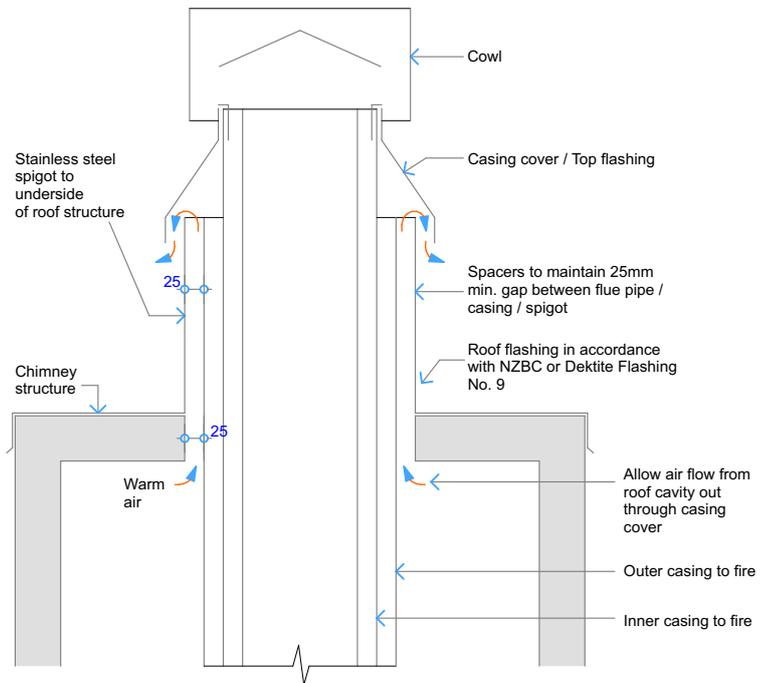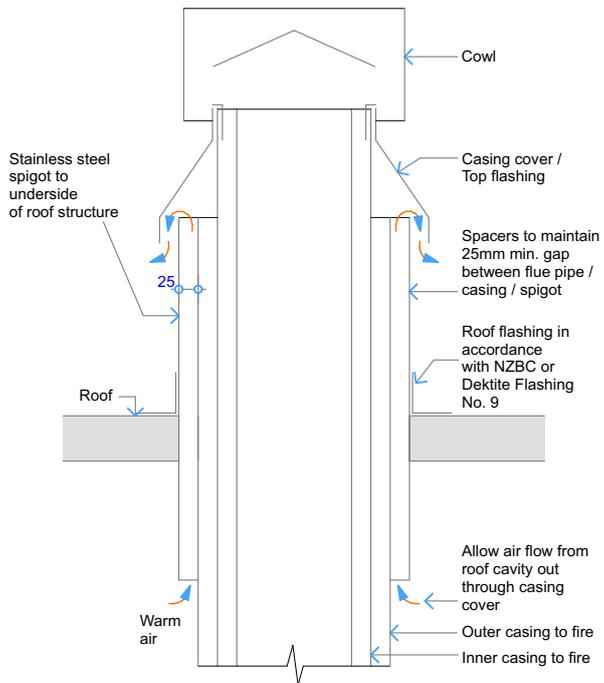


Detail Roof - Air Ventilation through Casing cover/ Top flashing

Detail Chimney - Air Ventilation through Casing cover/ Top flashing Opt. 2


Flue components:
 300mm dia. Flue
 350mm dia. Inner Casing
 400mm dia. Outer Casing
 450mm dia. S/S Spigot
 Deklite Flashing No. 9

NOTE:
 Flue components must be installed to AS/NZS2918:2001 requirements.
 All external penetration flashings must be installed in accordance with NZBC.
 Cavity airflow must be unobstructed from fire box to flue termination.
 25mm clearance between flue and combustible materials.
 75mm clearance between flue and wiring / plastic water pipes.
 Each flue joint must be sealed with a heat proof sealer.
 Each flue joint must have a minimum of 4 x Stainless Steel rivets.
 Flue to be adequately supported at 2m crs.

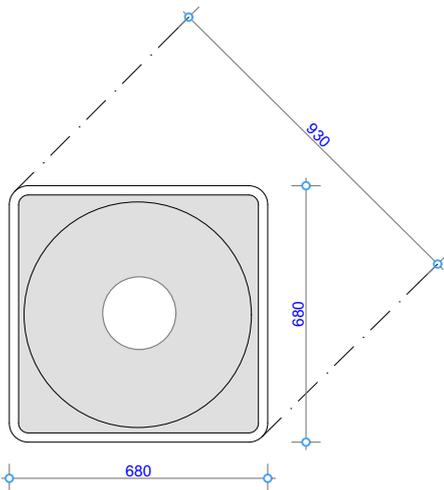


Deklite Flashing No. 9 - Plan View

COPYRIGHT © THIS DRAWING IS THE PROPERTY OF The Fire Dept.	Client: THE FIRE DEPT.		
	Product: WD1OL-1000		
	Title: VERTICAL FLUE EXIT DETAILS		
	Drawn: SR	Date: 31/05/2018	
	Chkd: JW	Date: 31/05/2018	
Appd: JW	Date: 31/05/2018	Scale: on A4	
Drawing No.	WD1OL-1000-913	Sheet 13 of 15	Revision 4

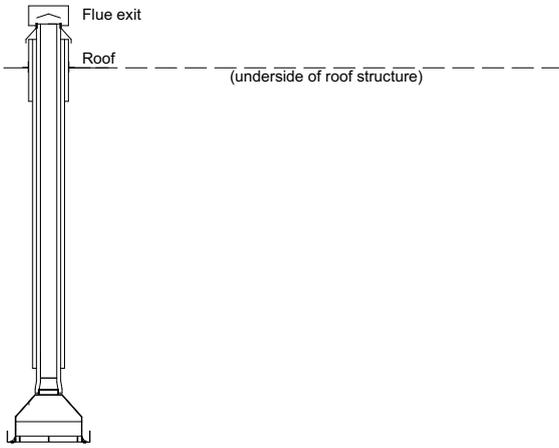


Vertical Flue Combination WD1A

NOTE:
 Flue components must be installed to AS/NZS2918:2001 requirements.
 All external penetration flashings must be installed in accordance with NZBC.
 Cavity airflow must be unobstructed from fire box to flue termination.
 25mm clearance between flue and combustible materials.
 75mm clearance between flue and wiring / plastic water pipes.
 Each flue joint must be sealed with a heat proof sealer.
 Each flue joint must have a minimum of 4 x Stainless Steel rivets.
 Flue to be adequately supported at 2m crs.

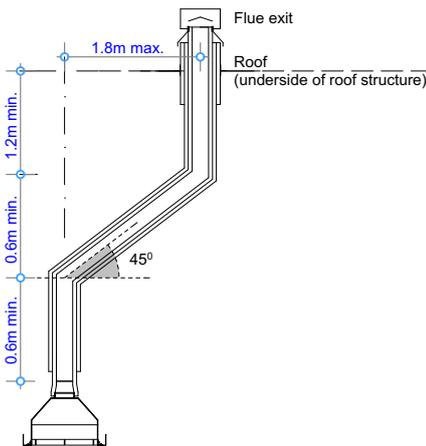

Vertical Flue Combination WD1B


NOTE:
 Flue components must be installed to AS/NZS2918:2001 requirements.
 All external penetration flashings must be installed in accordance with NZBC.
 Cavity airflow must be unobstructed from fire box to flue termination.
 25mm clearance between flue and combustible materials.
 75mm clearance between flue and wiring / plastic water pipes.
 Each flue joint must be sealed with a heat proof sealer.
 Each flue joint must have a minimum of 4 x Stainless Steel rivets.
 Flue to be adequately supported at 2m crs.

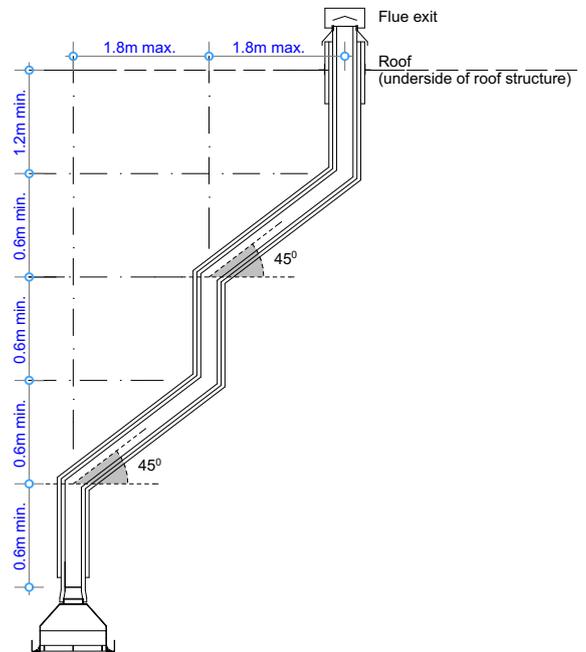

Vertical Flue Combination WD1C


NOTE:
 Flue components must be installed to AS/NZS2918:2001 requirements.
 All external penetration flashings must be installed in accordance with NZBC.
 Cavity airflow must be unobstructed from fire box to flue termination.
 25mm clearance between flue and combustible materials.
 75mm clearance between flue and wiring / plastic water pipes.
 Each flue joint must be sealed with a heat proof sealer.
 Each flue joint must have a minimum of 4 x Stainless Steel rivets.
 Flue to be adequately supported at 2m crs.

COPYRIGHT ©
 THIS DRAWING IS THE PROPERTY
 OF The Fire Dept.

Client: THE FIRE DEPT.		
Product: WD1OL-1000		
Title: VERTICAL FLUE COMBINATION OPTIONS		
Drawn: SR	Date: 31/05/2018	
Chkd: JW	Date: 31/05/2018	
Appd: JW	Date: 31/05/2018	
Scale:		on A4



Drawing No.	WD1OL-1000-914	Sheet 14 of 15	Revision 4
-------------	-----------------------	----------------	--

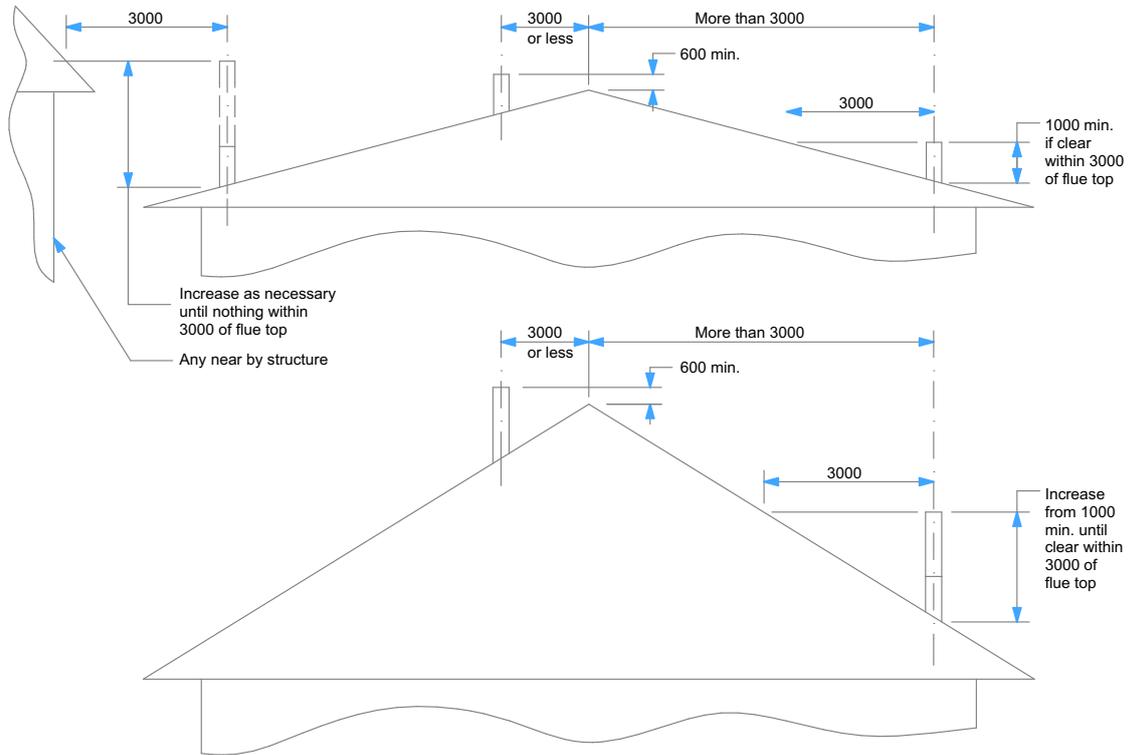

Minimum Height of Flue System Exit
Or as per AS/NZS 2918:2001

COPYRIGHT©
THIS DRAWING IS THE PROPERTY
OF **The Fire Dept.**

Client: THE FIRE DEPT.

Product: WD1OL-1000

Title: FLUE EXIT CLEARANCES

Drawn: SR


Date: 31/05/2018

Chkd: JW

Date: 31/05/2018

Appd: JW

Date: 31/05/2018



Scale: on A4

THE FIRE DEPT.

Drawing No. **WD1OL-1000-915**

Sheet 15 of 15

Revision

4