



WD1 – 1000 Open Front & Right

Specifications



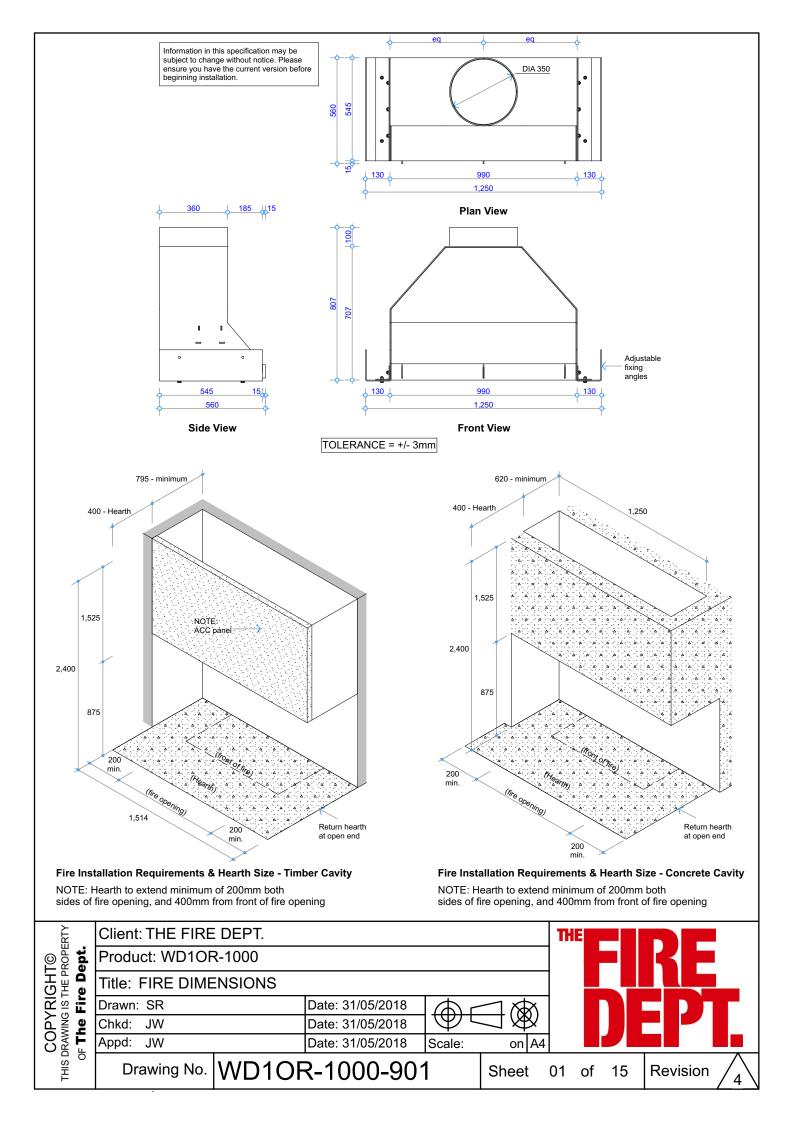

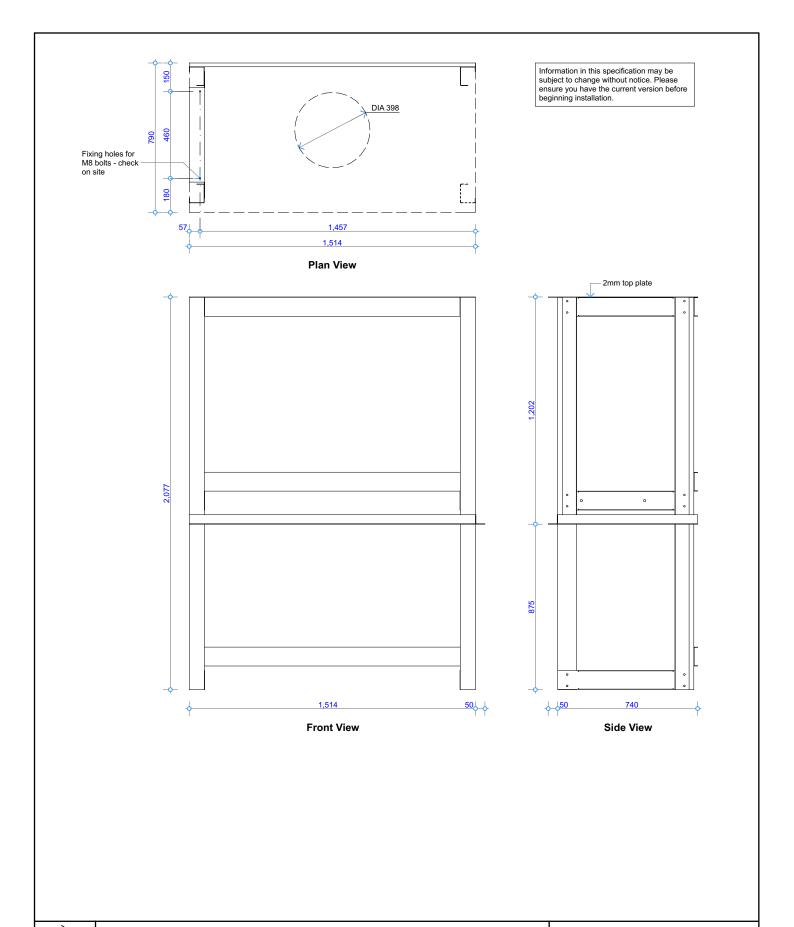

Client: THE FIRE DEPT.


Product: WD1OR-1000

Title: STEEL SUPPORT FRAME DIMENSIONS

 Drawn: SR
 Date: 31/05/2018

 Chkd: JW
 Date: 31/05/2018

 Appd: JW
 Date: 31/05/2018






Drawing No. W

WD10R-1000-902

Sheet 02 of 15

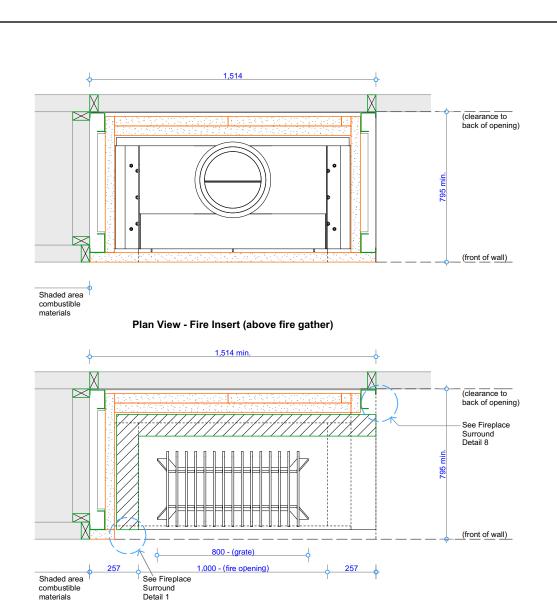

Plan View - Fire Insert (below fire gather)

Appd:

JW

Drawing No.


Client: THE FIRE DEPT. Product: WD1OR-1000

Title: CAVITY CLEARANCES - TIMBER

combustible materials

Date: 31/05/2018 Drawn: SR Chkd: JW Date: 31/05/2018

> Date: 31/05/2018 WD10R-1000-903






Sheet 03 of 15


Revision

4

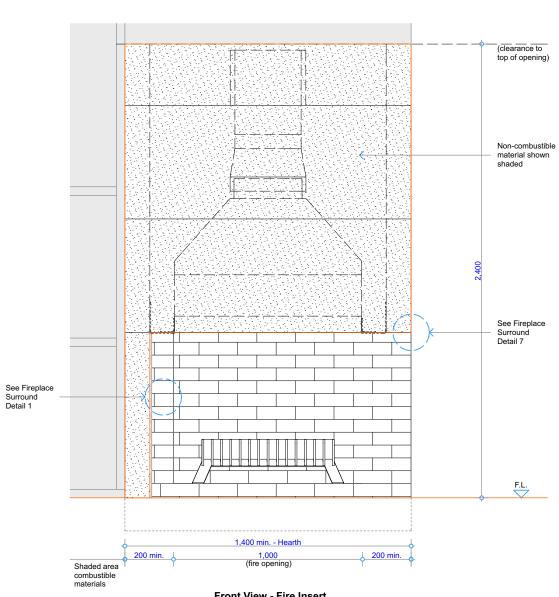

Front View - Fire Insert

COPYRIGHT©
THIS DRAWING IS THE PROPERTY Client: THE FIRE DEPT. oF The Fire Dept. Product: WD1OR-1000 Title: CAVITY CLEARANCES - TIMBER Drawn: SR Date: 31/05/2018 JW Date: 31/05/2018 Chkd: Appd: JW Date: 31/05/2018 on A4 Scale: WD10R-1000-904 Drawing No. Sheet 04 of 15 Revision 4

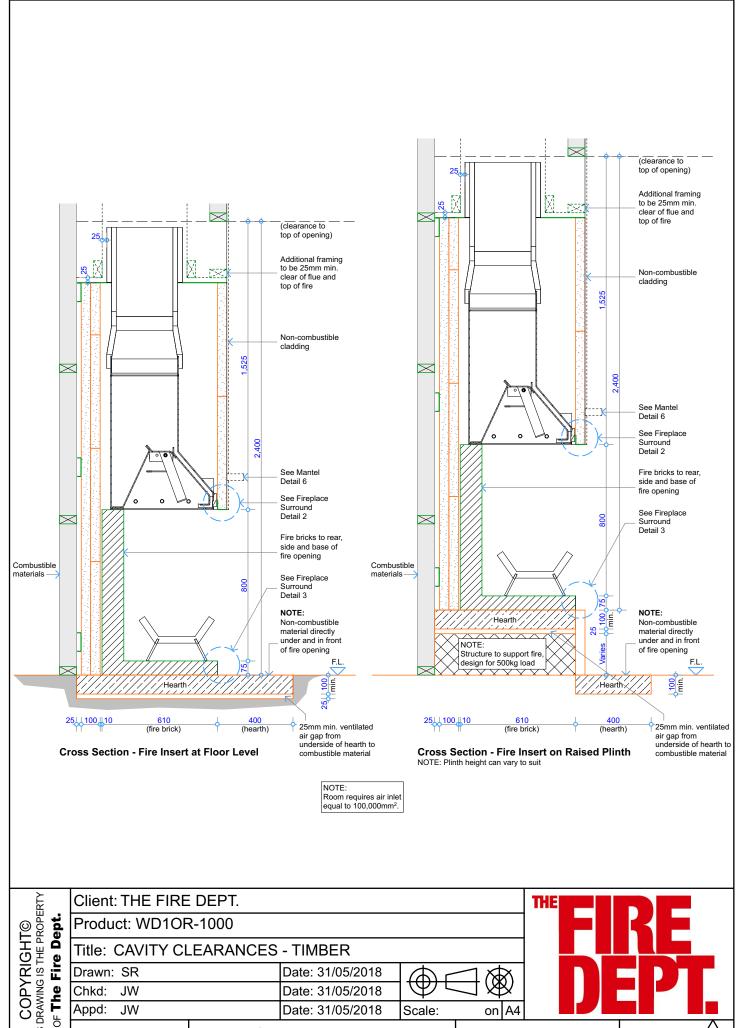


COPYRIGHT©
THIS DRAWING IS THE PROPERTY

on A4 Scale:



WD1OR-1000-905 Drawing No.

Sheet 05 of 15

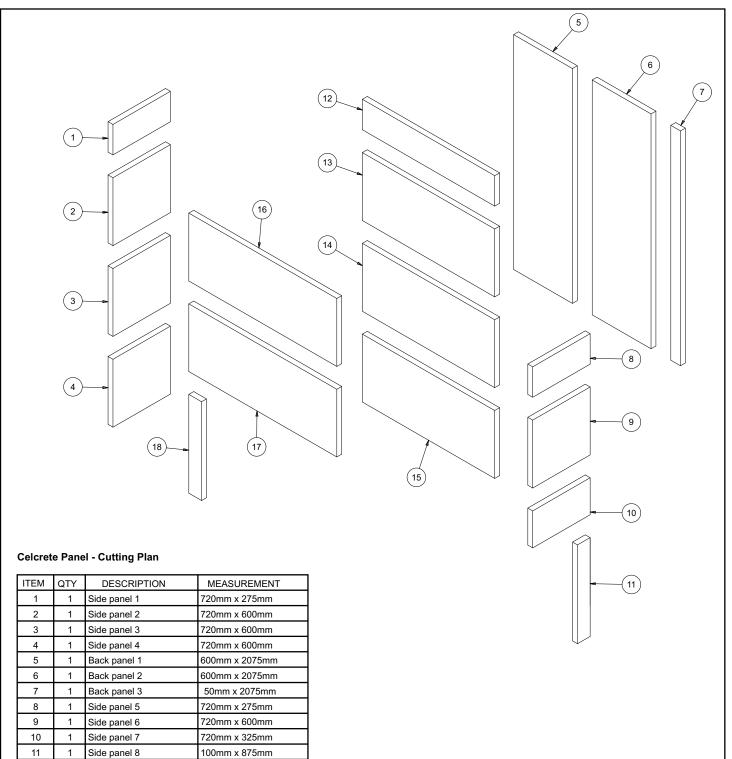

		p	
2	1	Side panel 2	720mm x 600mm
3	1	Side panel 3	720mm x 600mm
4	1	Side panel 4	720mm x 600mm
5	1	Back panel 1	600mm x 2075mm
6	1	Back panel 2	600mm x 2075mm
7	1	Back panel 3	50mm x 2075mm
8	1	Side panel 5	720mm x 275mm
9	1	Side panel 6	720mm x 600mm
10	1	Side panel 7	720mm x 325mm
11	1	Side panel 8	100mm x 875mm
12	1	Back panel 4	275mm x 1250mm
13	1	Back panel 5	600mm x 1250mm
14	1	Back panel 6	600mm x 1250mm
15	1	Back panel 7	600mm x 1250mm
16	1	Front panel 1	600mm x 1510mm
17	1	Front panel 2	600mm x 1510mm
18	1	Front panel 3	130mm x 875mm
19		Panel not required	

Client: THE FIRE DEPT.

Product: WD1OR-1000


Title: CELCRETE CUTTING PLAN - TIMBER CAVITY

Drawn: SR Date: 31/05/2018 Chkd: JW Date: 31/05/2018 Appd: JW Date: 31/05/2018 Scale: on A4




WD10R-1000-906 Drawing No.

Sheet 06 of 15

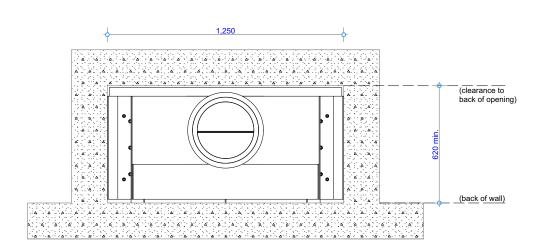


Plan View - Fire Insert (above fire gather)

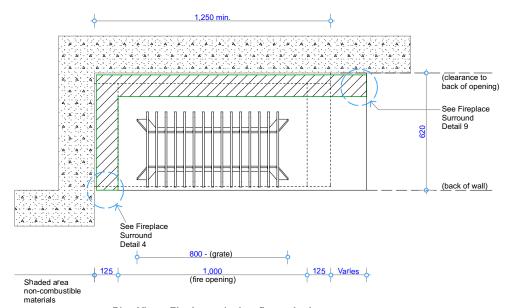

Plan View - Fire Insert (below fire gather)


COPYRIGHT©
THIS DRAWING IS THE PROPERTY Client: THE FIRE DEPT. oF The Fire Dept. Product: WD1OR-1000 Title: CAVITY CLEARANCES - CONCRETE Drawn: SR Date: 31/05/2018 JW Date: 31/05/2018 Chkd: Appd: JW Date: 31/05/2018 Scale: on A4 WD10R-1000-907 Drawing No. Sheet 07 of 15 Revision


4

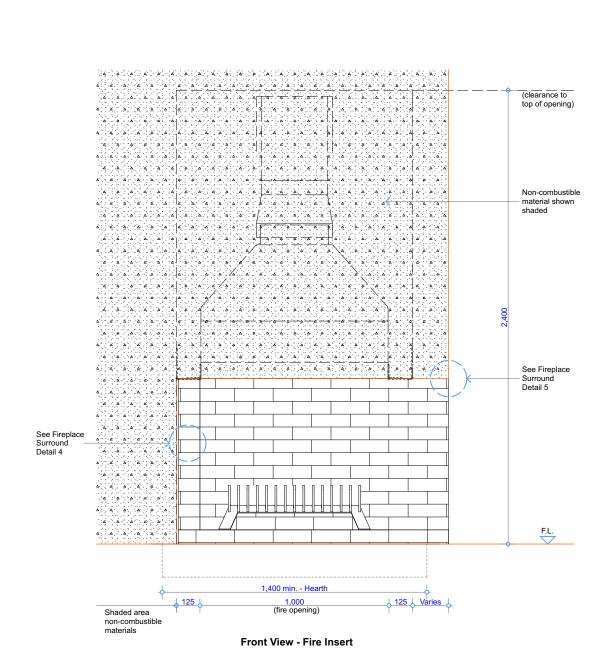


COPYRIGHT©
THIS DRAWING IS THE PROPERTY Client: THE FIRE DEPT. oF The Fire Dept. Product: WD1OR-1000 Title: CAVITY CLEARANCES - CONCRETE Date: 31/05/2018 Drawn: SR Chkd: JW Date: 31/05/2018 Appd: JW Date: 31/05/2018 Scale: Sheet 15


WD1OR-1000-908 Drawing No.

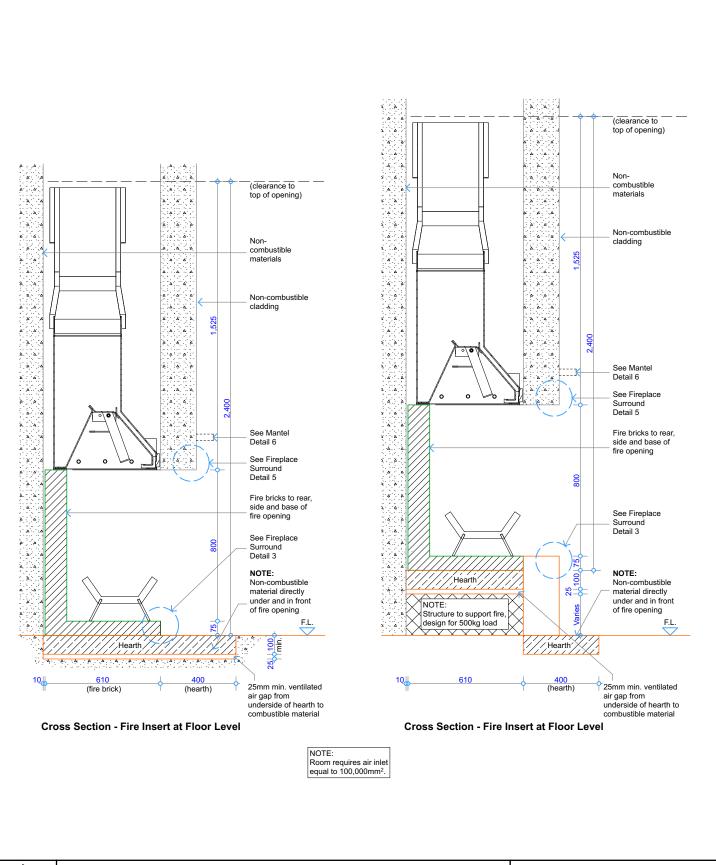

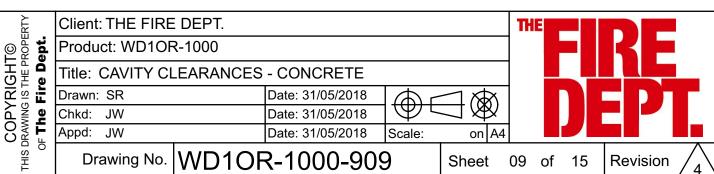


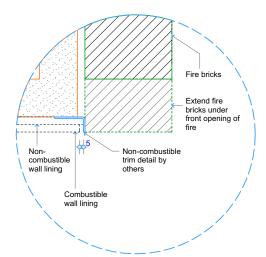


Detail 1 - Plan View Fire Surround Opt. 1 **Timber Cavity**

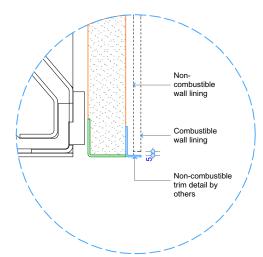


Detail 2 - Cross Section Fire Surround Opt. 3 **Timber Cavity**




Detail 3 - Cross Section Fire Surround Opt. 5 **Timber Cavity**

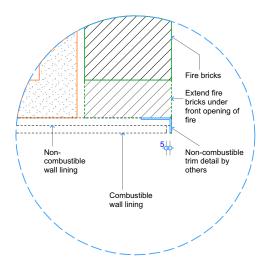

Detail 1 - Plan View Fire Surround Opt. 2 **Timber Cavity**

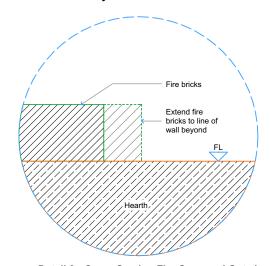

Detail 3 - Cross Section Fire Surround Opt. 4 **Timber Cavity**

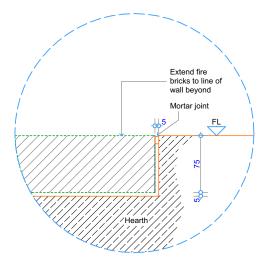

Detail 3 - Cross Section Fire Surround Opt. 6 **Concrete Cavity**

Client: THE FIRE DEPT.

Product: WD1OR-1000

Title: SURROUND DETAILS

Drawn: SR Date: 31/05/2018 Chkd: JW Date: 31/05/2018 Appd: JW


Date: 31/05/2018

Scale: on




WD10R-1000-910 Drawing No.


Sheet 10 15 of

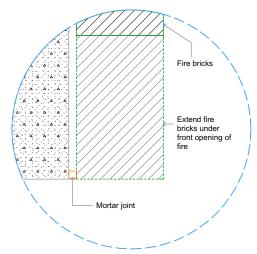


Detail 4 - Plan View Fire Surround Opt. 7 **Concrete Cavity**

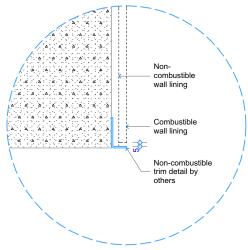


Detail 5 - Cross Section Fire Surround Opt. 9 **Concrete Cavity**

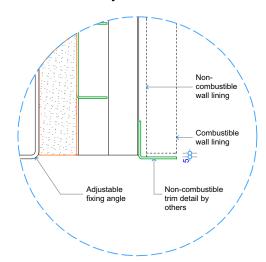


Detail 7 - Cross Section Fire Surround Timber Cavity

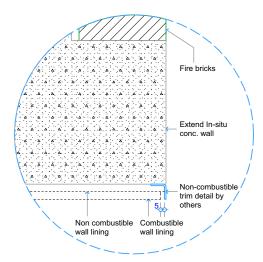

Detail 4 - Plan View Fire Surround Opt. 8 **Concrete Cavity**

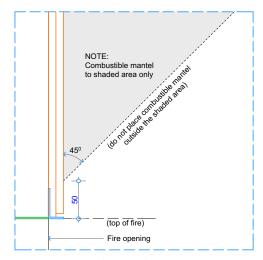

Detail 6 - Top of Fire to Combustible Mantel

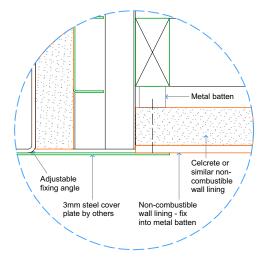

Detail 7 - Cross Section Fire Surround Opt. 14 **Timber Cavity**

Client: THE FIRE DEPT.


Product: WD1OR-1000

Title: SURROUND DETAILS

Drawn: SR


Date: 31/05/2018 Date: 31/05/2018 Chkd: JW Appd: Date: 31/05/2018 JW

Drawing No. | WD10R-1000-911





Sheet 11 15 of

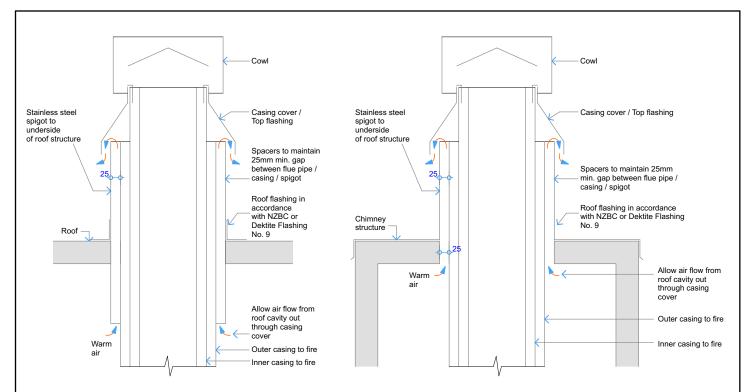

Detail Roof - Air Ventilation through Casing cover/ Top flashing


Detail Chimney - Air Ventilation through Casing cover/ Top flashing Opt. 2

Flue components: 300mm dia. Flue 350mm dia. Inner Casing 400mm dia. Outer Casing 450mm dia. S/S Spigot Dektite Flashing No. 9

Flue to be adequately supported at 2m crs.


NOTE:

Flue components must be installed to AS/NZS2918:2001 requirements. All external penetration flashing's must be installed in accordance with NZBC. Cavity airflow must be unobstructed from fire box to flue termination. 25mm clearance between flue and combustible materials. 75mm clearance between flue and wiring / plastic water pipes. Each flue joint must be sealed with a heat proof sealer. Each flue joint must have a minimum of 4 x Stainless Steel rivets.

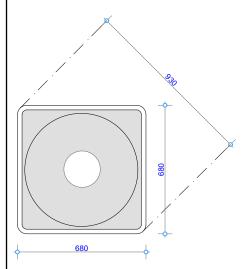

Dektite Flashing No. 9 - Plan View


COPYRIGHT©
THIS DRAWING IS THE PROPERTY Client: THE FIRE DEPT. oF The Fire Dept. Product: WD1OR-1000 Title: VERTICAL FLUE EXIT DETAILS SR Date: 31/05/2018 Drawn: Chkd: JW Date: 31/05/2018 Appd: Date: 31/05/2018 JW Scale: on WD10R-1000-913 Drawing No. Sheet 13 15 Revision of

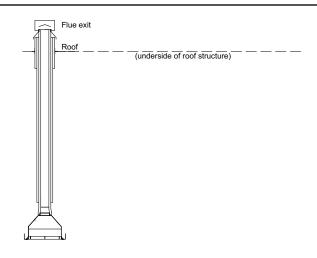

Vertical Flue Combination WD1A

NOTE:


Flue components must be installed to AS/NZS2918:2001 requirements.
All external penetration flashing's must be installed in accordance with NZBC.
Cavity airflow must be unobstructed from fire box to flue termination.
25mm clearance between flue and combustible materials.
75mm clearance between flue and wiring / plastic water pipes.
Each flue joint must be sealed with a heat proof sealer.
Each flue joint must have a minimum of 4 x Stainless Steel rivets.
Flue to be adequately supported at 2m crs.

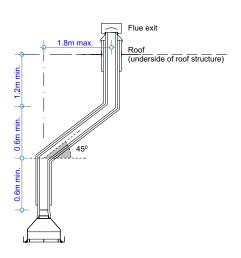

Vertical Flue Combination WD1B

NOTE:

Flue components must be installed to AS/NZS2918:2001 requirements. All external penetration flashing's must be installed in accordance with NZBC. Cavity airflow must be unobstructed from fire box to flue termination. 25mm clearance between flue and combustible materials. 75mm clearance between flue and wiring / plastic water pipes. Each flue joint must be sealed with a heat proof sealer. Each flue joint must have a minimum of 4 x Stainless Steel rivets. Flue to be adequately supported at 2m crs.

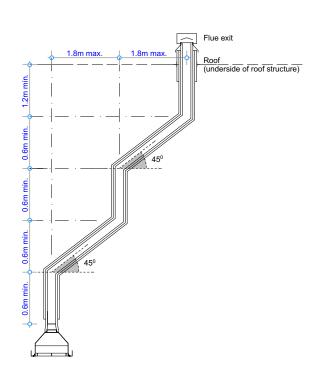

Vertical Flue Combination WD1C

NOTE

Flue components must be installed to AS/NZS2918:2001 requirements. All external penetration flashing's must be installed in accordance with NZBC. Cavity airflow must be unobstructed from fire box to flue termination. 25mm clearance between flue and combustible materials. 75mm clearance between flue and wiring / plastic water pipes. Each flue joint must be sealed with a heat proof sealer. Each flue joint must have a minimum of 4 x Stainless Steel rivets. Flue to be adequately supported at 2m crs.

COPYRIGHT© THIS DRAWING IS THE PROPERTY OF **The Fire Dept.**

Appd:

JW

Client: THE FIRE DEPT.


Product: WD1OR-1000

Title: VERTICAL FLUE COMBINATION OPTIONS

 Drawn: SR
 Date: 31/05/2018

 Chkd: JW
 Date: 31/05/2018


Date: 31/05/2018





Drawing No. WD10R-1000-914

Sheet 14 of 15

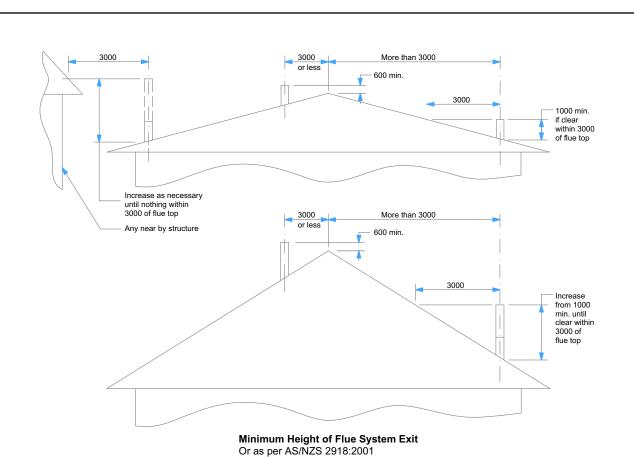

COPYRIGHT©
THIS DRAWING IS THE PROPERTY Client: THE FIRE DEPT. oF The Fire Dept. Product: WD1OR-1000 Title: FLUE EXIT CLEARANCES Date: 31/05/2018 Drawn: SR **(** Chkd: JW Date: 31/05/2018 Appd: JW Date: 31/05/2018 Scale: WD10R-1000-915 Drawing No.

Sheet 15 of 15

on A4

Revision

4